


GUS4-103-PE

GUS Spring-cage terminal block

Download date : 2025-12-06



Electrical Diagram :



For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	/	/	/
Rated Current [A]	/	/	/
Withstanding Voltage	/		
Wire Range	24-10AWG		

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3
Rated Voltage	/
Rated Current	/
Impulse withstand voltage	8KV

Conductor cross section

Soild	0.2-6.0mm ²
Flexible	0.2-4.0mm ²

GUS4-103-PE

GUS Spring-cage terminal block

Download date : 2025-12-06



Flexible with ferrule	0.2-4.0mm ²
-----------------------	------------------------


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	71.7/35.4/6.2
Connection Points	3
Stripping Length [mm]	8-10
Type of rail	DIN 35
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105


Dimensions

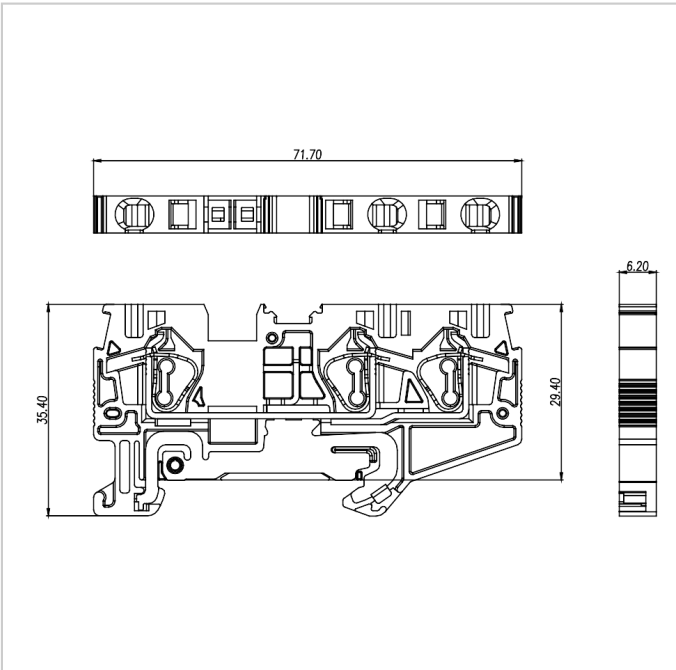


Accessories




[FUVA4-XX](#)




[MUV4-10](#)



[PUV4-80](#)




[EB-35](#)



[EW-35](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)



[DUS4-103](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)