

For reference only!version1.0

### CUL Technical Data (UL1059 )

| Use Group         | B     | C   | D   |
|-------------------|-------|-----|-----|
| Rated Voltage [V] | 300   | 300 | 600 |
| Rated Current [A] | 15    | 15  | 5   |
| Wire Range        | 26-14 |     |     |

### IEC Technical Data (IEC 60947-7-1)

|                           |      |
|---------------------------|------|
| Overvoltage Category      | III  |
| Contamination Class       | 3    |
| Rated Voltage [V]         | 500V |
| Rated Current [A]         | 16A  |
| Impulse withstand voltage | 6KV  |

### Conductor cross section

|                       |                        |
|-----------------------|------------------------|
| Soild                 | 0.2-1.5mm <sup>2</sup> |
| Flexible              | 0.2-1.5mm <sup>2</sup> |
| Flexible with ferrule | 0.2-1.0mm <sup>2</sup> |

### Material

# GUV1.5-202-PV

GUV Push-in terminal block

Download date : 2025-12-07




|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |


## Other Data

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 65.6/41.1/3.5 |
| Stripping Length [mm]        | 8-10          |

## Dimensions

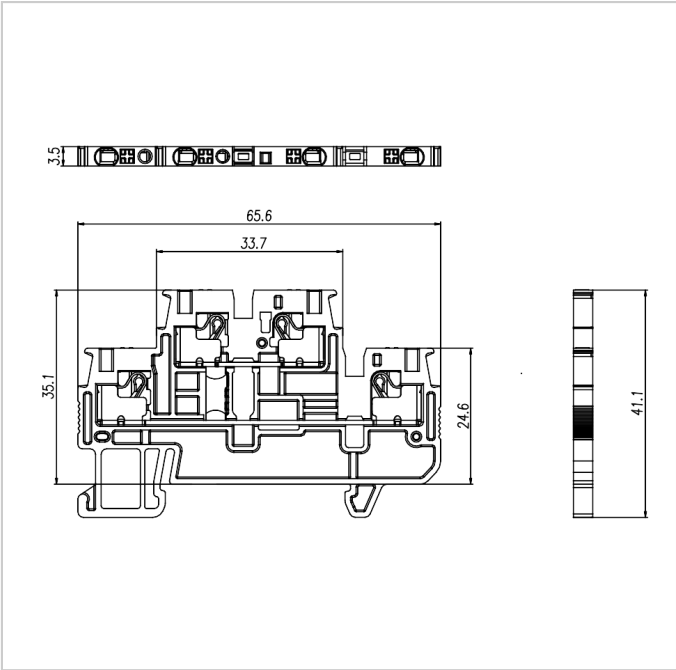


## Accessories




[FUVA1.5-XX](#)




[DUV1.5-202](#)



[PUV1.5-144](#)



[EB-35](#)



[EW-35](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)