


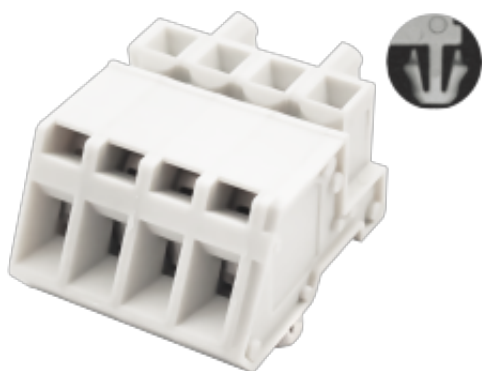

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range [AWG]	28-12		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	320	320	630
Rated Current [A]	12	12	12
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm²]	0.2~2.5		

Material


Insulation Material	PA66
Flame retardant rating	UL94V-0

Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Pitch/Poles [mm]/[P]	5.0/2-24
Stripping Length [mm]	7-8
Screw/Torque(Max)[N.m]	-
Operating temperature [°C]	-40°C~+105°C
Soldering temperature	-
Pin dimensions [mm]	-
PCB Hole Diameter [mm]	-


Dimensions

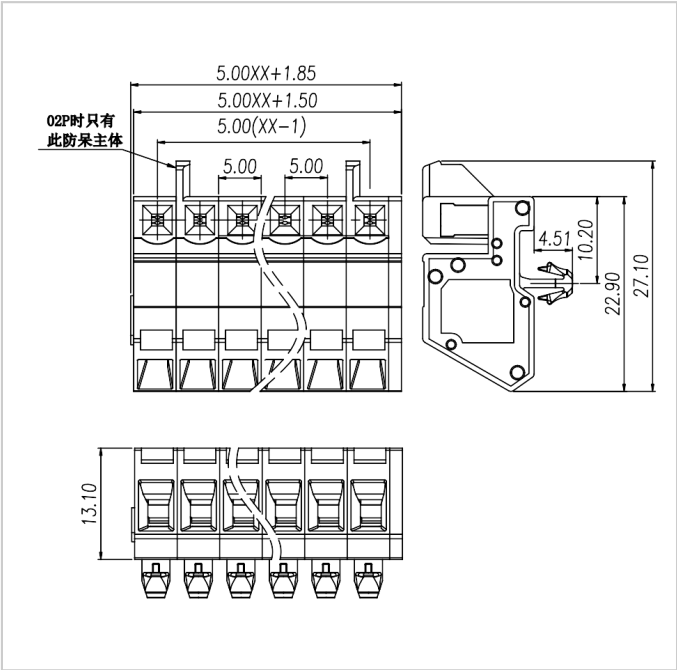


Accessories




[WJ0402-05XX](#)



[WJ0402-06XX](#)



[WJ0402-07XX](#)



[WJ0402-08XX](#)