


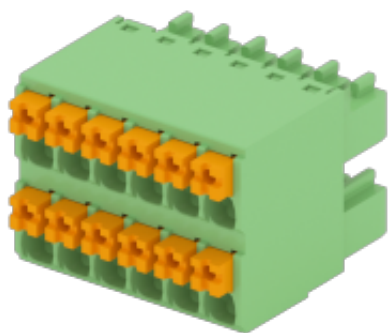

For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	10	-	10
Wire Range [AWG]	28-16		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	160	160	320
Rated Current [A]	10	10	10
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.2-1.5		

Material


Insulation Material	PA66
Flame relardant rating	UL94V-0

Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data


Pitch/Poles [mm]/[P]	3.5/2*2-2*24
Stripping Length [mm]	9-10
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40°C~+105°C
Soldering temperature	/
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/

Dimensions

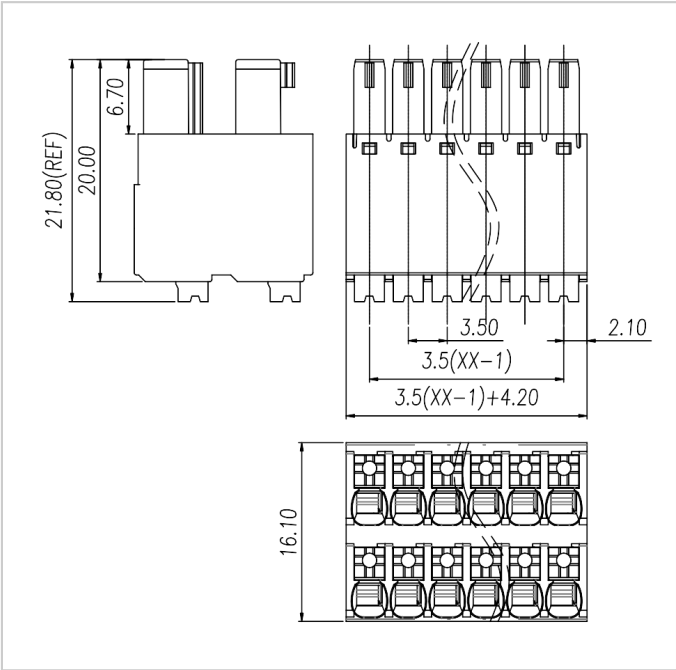

Accessories

-



[WJ15EDGVHB-THT-3.5/3.81](#)



[WJ15EDGRHB-THT-3.5/3.81](#)