


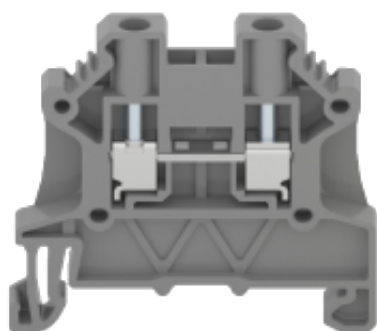

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	600	600	600
Rated Current [A]	25	25	5
Wire Range	26-12		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	800V
Rated Current [A]	24A
Impulse withstand voltage	8KV

Conductor cross section

Soild	0.2-4.0mm ²
Flexible	0.2-2.5mm ²
Flexible with ferrule	0.5-1.5mm ²

Material

GUT2.5-102

GUT STEEL WIRE FRAME TERMINAL BLOCK

Download date : 2025-12-06



Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Length/Height/Thickness [mm]	44.0mm/40.0mm/5.2mm
Stripping Length [mm]	8-9
Screw/Torque(Max)[N.m]	M2.5/0.4-0.5

Dimensions

