


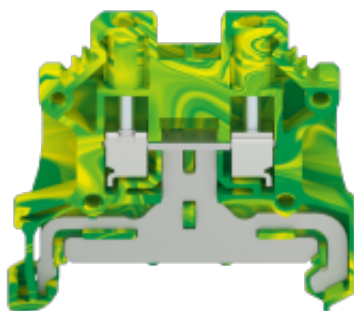

For reference only!version1.0

CUL Technical Data (UL1059)

Wire Range	26-12AWG
------------	----------

Conductor cross section

Soild	0.2-4.0mm ²
Flexible	0.2-2.5mm ²
Flexible with ferrule	0.25-2.5mm ²

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage	8KV

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

GUT2.5-102-PE

GUT STEEL WIRE FRAME TERMINAL BLOCK

Download date : 2025-12-06



Length/Height/Thickness [mm]	44.0/40.0/5.2
Stripping Length [mm]	8-9
Screw/Torque(Max)[N.m]	M2.5/0.4-0.5

Dimensions

