


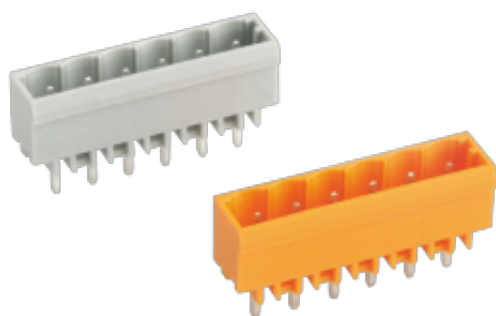

MCS terminal Block

Rated current: 15 A

Rated voltage: 300 V

Pitch: 5.0 mm/5.08 mm



For reference only!version1.0

UL/CUL


Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range [AWG]	/		
Dielectric Voltage-Withstand	1.6KV		

IEC


Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	320	320	630
Rated Current [A]	12	12	12
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm²]	/		

Material


Insulation Material	PA66
Flame relardant rating	UL94V-0




[WJ0401/0501-01XX](#)



[WJ0401/0501-03XX](#)



[WJ0401/0501-05XX](#)




[WJ0401/0501-07XX](#)




[WJ0405/0505-01XX](#)




[WJ0405/0505-03XX](#)



[WJ0406-01XX](#)



[WJ0406-03XX](#)



[WJ0406-05XX](#)