

PCB connector
Rated current: 8 A
Rated voltage: 300 V
Wire range: 24-16 AWG
Pitch: 3.5 mm/3.81 mm
Connection method: Push-in spring connection



For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	8	-	8
Wire Range [AWG]	24~16		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	160	160	320
Rated Current [A]	8	8	8
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.2~1.5		


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data


Pitch/Poles [mm]/[P]	3.5 , 3.81/2~24
Stripping Length [mm]	9~10
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105
Soldering temperature	/
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/

Dimensions

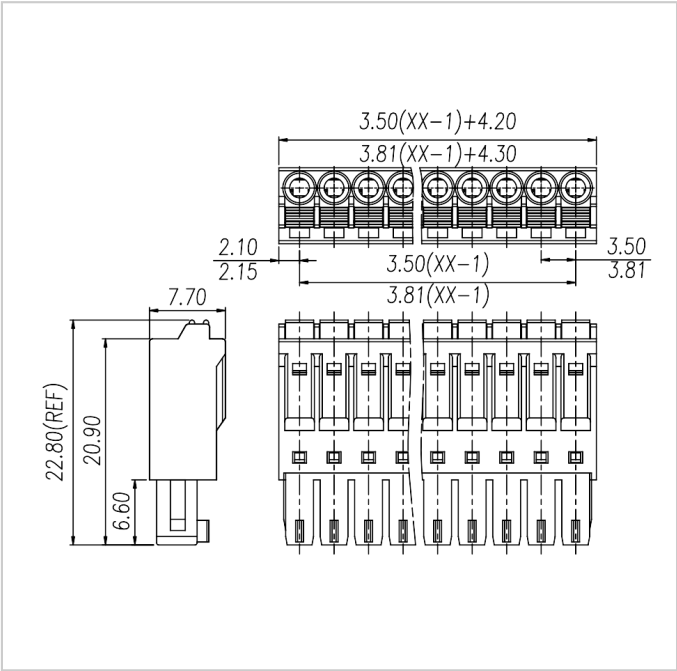

Accessories

-



[WJ15EDGVHB-THT-3.5/3.81](#)




[WJ15EDGRHB-THT-3.5/3.81](#)




[WJ15EDGVC-THR-3.5/3.81](#)



[WJ15EDGRC-THR-3.5/3.81](#)




[WJ15EDGKR-3.81](#)




[WJ15EDGKNR-3.5](#)



[WJ15EDGLC-3.5/3.81](#)



[WJ15EDGVC-3.5/3.81](#)



[WJ15EDGRC-3.5/3.81](#)

[WJ15EDGVH3C-3.5](#)

[WJ15EDGRH3C-3.5](#)

[WJ15EDGVH3C-THT-3.5](#)

[WJ15EDGRH3C-THT-3.5](#)