


电路图：



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术参数-UL ( 1059 )

|                 |         |
|-----------------|---------|
| 接线范围 Wire Range | 18-2AWG |
|-----------------|---------|

技术参数-IEC(60947-7-2)

|                            |     |
|----------------------------|-----|
| 过电压类别 Overvoltage Category | III |
| 污染等级 Contamination Class   | 3   |

导线截面积 Conductor cross section

|                                |                      |
|--------------------------------|----------------------|
| 单芯 Solid                       | 10-35mm <sup>2</sup> |
| 柔性导线 Flexible                  | 10-35mm <sup>2</sup> |
| 柔性导线带冷压头 Flexible with ferrule | 10-35mm <sup>2</sup> |

材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame retardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Ni plated    |

一般参数 Other Data

GUSLKG35-102-PE


GUK 通用组合接线端子

下载日期:2025-12-06




|                                    |                |
|------------------------------------|----------------|
| 长/高/厚 Length/Height/Thickness [mm] | 50.0/61.8/15.2 |
| 连接点数 Connection Points             | 2              |
| 剥线长度 Stripping Length [mm]         | 16-17          |
| 导轨类型 Type of rail                  | DIN 35/32      |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]       | M6/3.2-3.7     |
| 工作温度 Operating temperature [°C]    | -40~+105       |


尺寸图

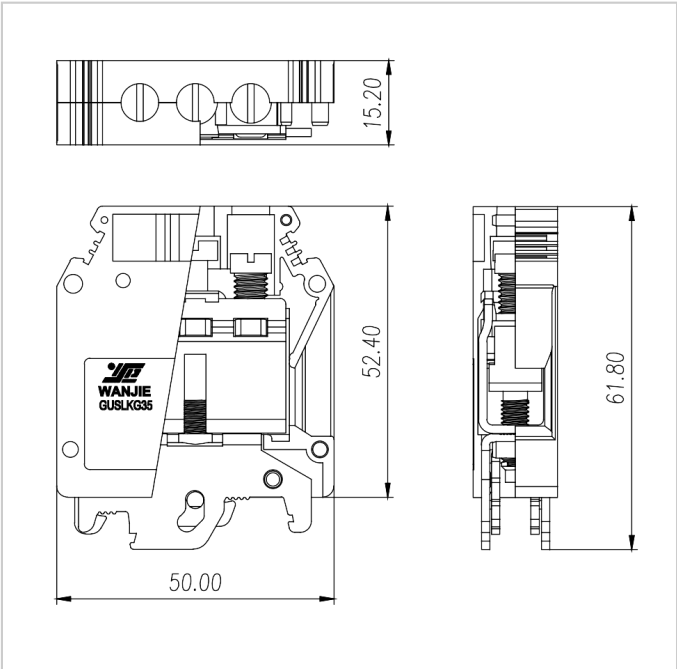

配件



EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B




DGL2-35x7.5C



DGL2-35x7.5D



MUV10-10



DGS1-35x7.5W4.2x12

DGS1-35x7.5W5.2x15

DGS1-35x7.5W