

Rated current: 15A

Rated voltage: 300V

Use wire diameter: 26-14AWG

spacing:3.5mm

Install: DGL2-35x7.5

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	300	300	600
Rated Current [A]	15	15	5
Wire Range [AWG]	26～14		

IEC (60947-7-1)

Rated Voltage [V]	500
Rated Current [A]	17.5
Soild [mm²]	0.2-1.5
Flexible [mm²]	0.2-1.5
Flexible with ferrule [mm²]	0.2-1.0

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	6


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Date

Length/Height/Thickness [mm]	63.6/30.6/3.5
Stripping Length [mm]	8-10

Dimensions

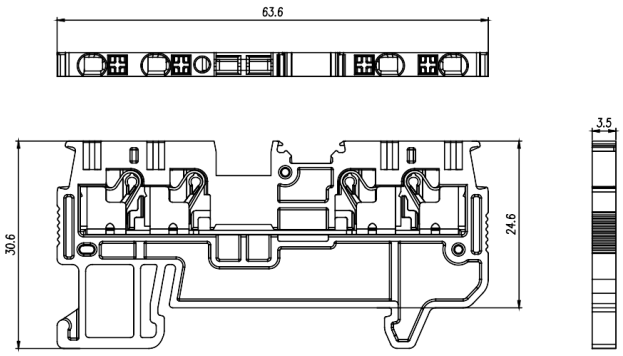

Accessories




FUVA1.5-XX




DUV1.5-104



MUV1.5-10



PUV1.5-144




EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D