


Use wire diameter: 20-8AWG

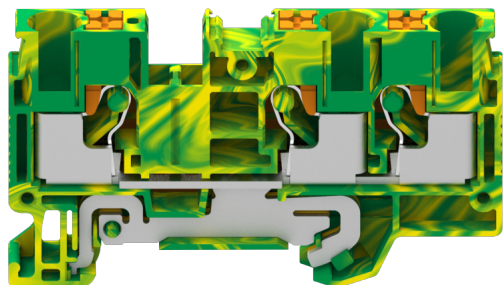

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

| Use Group        | B | C    | D |
|------------------|---|------|---|
| Wire Range [AWG] |   | 20~8 |   |

IEC ( 60947-7-1 )

|  |          |
|--|----------|
| Soild [mm <sup>2</sup> ]                 | 0.5-10.0 |
| Flexible [mm <sup>2</sup> ]              | 0.5-6.0  |
| Flexible with ferrule [mm <sup>2</sup> ] | 0.5-6.0  |
| Overvoltage Category                     | III      |
| Contamination Class                      | 3        |
| Impulse withstand voltage [KV]           | 8        |


Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Date

|                              |               |
|------------------------------|---------------|
| Length/Height/Thickness [mm] | 74.2/42.3/8.2 |
| Stripping Length [mm]        | 10-12         |

Dimensions

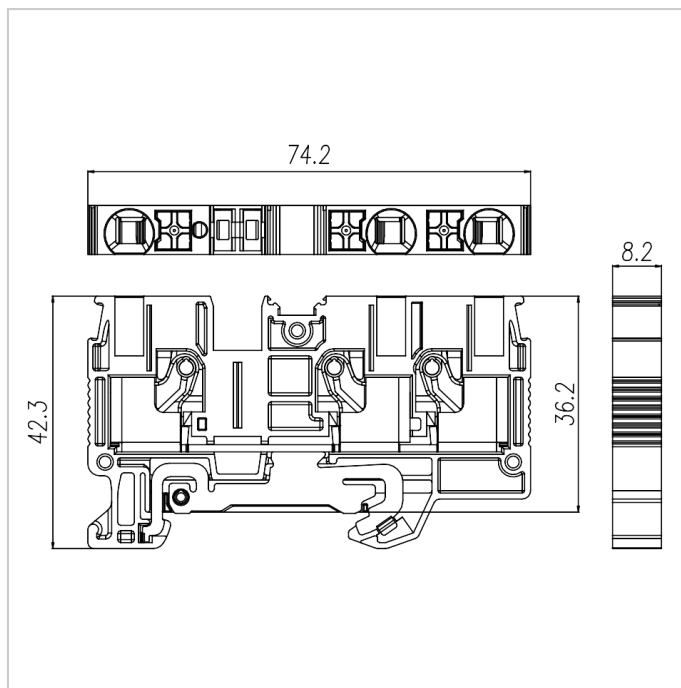


Accessories



FUVA6-XX



DUV6-103



MUV6-10



PUV6-56



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D