

Use wire diameter: 20-6AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Wire Range [AWG]	20 ~ 6		

IEC (60947-7-2)

Soild [mm²]	0.5-16.0
Flexible [mm²]	0.5-10.0
Flexible with ferrule [mm²]	0.5-10.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date


Length/Height/Thickness [mm]	89.2/49.7/10.2
Stripping Length [mm]	18

Dimensions

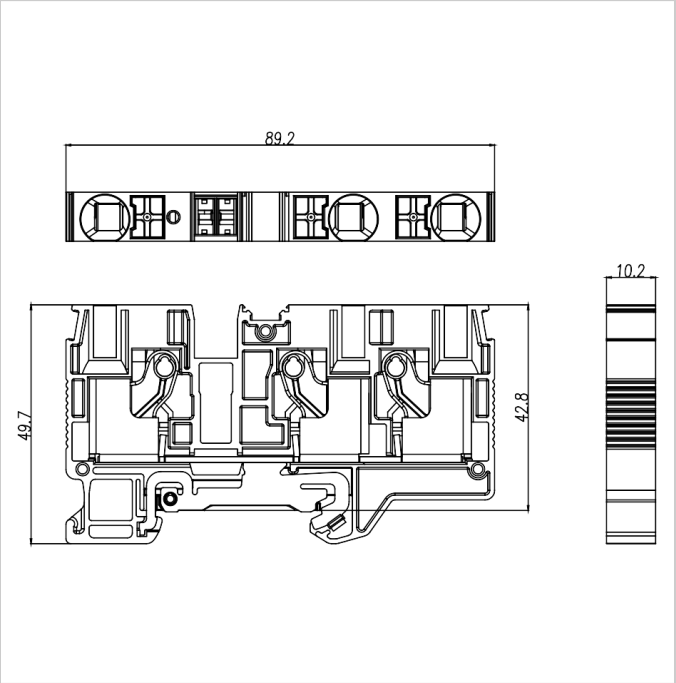


Accessories






FUVA10-XX



DUV10-103



MUV10-10




PUV10-48

EB-35


EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D