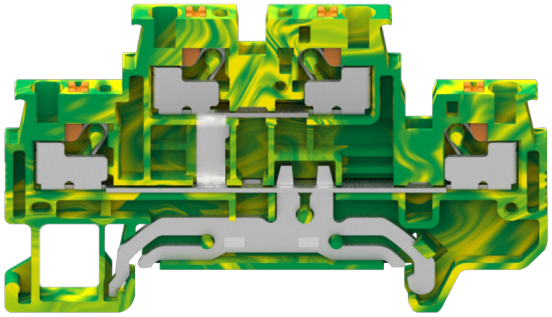


Use wire diameter: 26-14AWG

spacing:3.5mm

Install: DGL2-35x7.5

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Wire Range [AWG]	26～14

IEC (60947-7-1)

Soild [mm²]	0.2-1.5
Flexible [mm²]	0.2-1.5
Flexible with ferrule [mm²]	0.2-1.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	6

Material


Insulation Material	PA66

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Length/Height/Thickness [mm]	65.6/41.1/3.5
Stripping Length [mm]	8-10

Dimensions

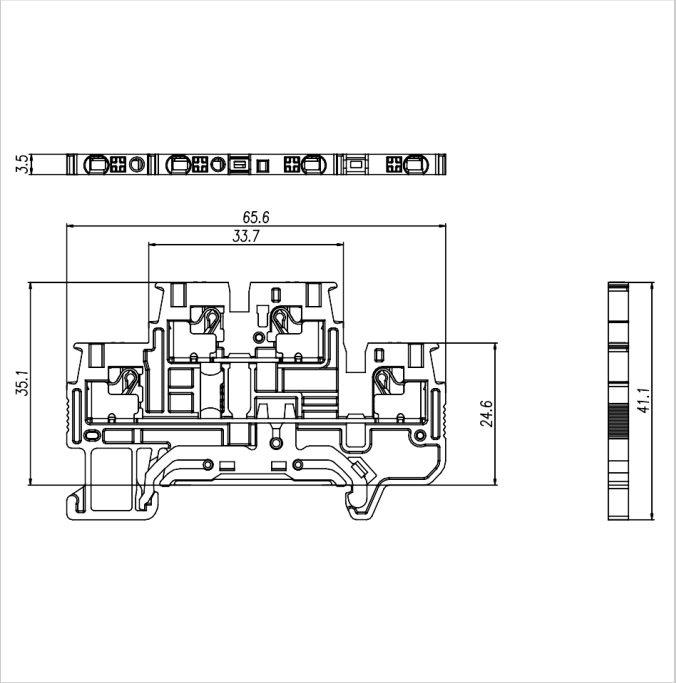


Accessories




FUVA1.5-XX



DUV1.5-202



PUV1.5-144




EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D