

Use wire diameter: 26-10AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Wire Range [AWG]	26 ~ 10
------------------	---------

IEC (60947-7-2)

Soild [mm ²]	0.2-6.0
Flexible [mm ²]	0.2-4.0
Flexible with ferrule [mm ²]	0.25-4.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material

Insulation Material	PA66
---------------------	------

GUT4-102-PE

GUT Steel wire frame terminal block

Download Date:2026-03-20




Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Length/Height/Thickness [mm]	44.0/40.0/6.2
Stripping Length [mm]	8-9
Screw/Torque [N.m]	M3/0.5-0.6

Dimensions

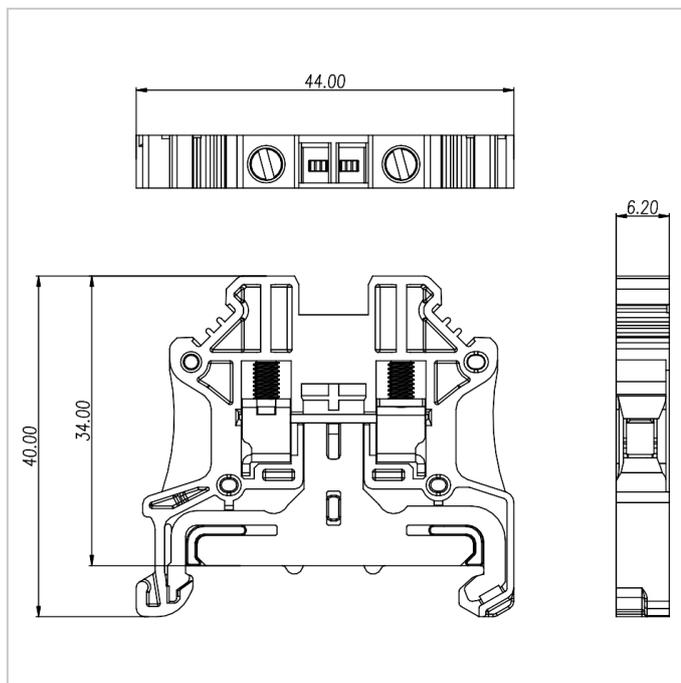

Accessories



FUVA4-XX



DUT2.5-102



MUV4-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D