


# GWS1.5J

GWS Spring-cage terminal block

Download Date:2026-03-21

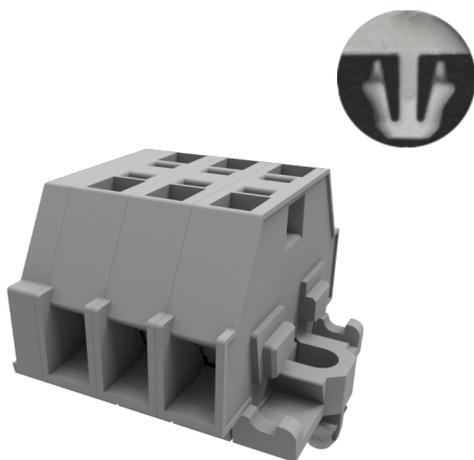

Rated current: 10A

Rated voltage: 300V

Use wire diameter: 28-16AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

Use Group	B	C	D
Rate Voltage [V]	300	300	600
Rated Current [A]	10	10	5
Wire Range [AWG]	28 ~ 16		

## IEC

Rated Voltage [V]	400
Rated Current [A]	18
Soild [mm <sup>2</sup> ]	0.2-1.5
Flexible [mm <sup>2</sup> ]	0.2-1.5
Overvoltage Category	III

# GWS1.5J

GWS Spring-cage terminal block

Download Date:2026-03-21



Contamination Class	3
Impulse withstand voltage [KV]	6

## Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

## Other Date

Stripping Length [mm]	8-9
-----------------------	-----

## Dimensions

