


# GWS2.5B

GWS Spring-cage terminal block

Download Date:2026-03-21

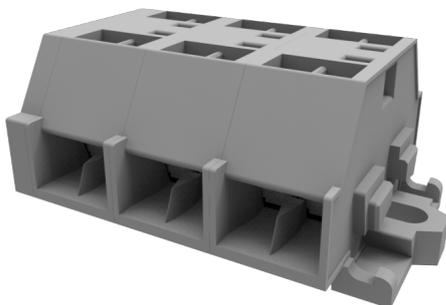

Rated current: 15A

Rated voltage: 300V

Use wire diameter: 28-14AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

Use Group	B	C	D
Rate Voltage [V]	300	300	600
Rated Current [A]	15	15	5
Wire Range [AWG]	28 ~ 14		

## IEC

Rated Voltage [V]	500
Rated Current [A]	24
Soild [mm <sup>2</sup> ]	0.2-2.5
Flexible [mm <sup>2</sup> ]	0.2-2.5
Overvoltage Category	III

# GWS2.5B

GWS Spring-cage terminal block

Download Date:2026-03-21



Contamination Class	3
Impulse withstand voltage [KV]	6

## Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

## Other Date

Stripping Length [mm]	8-9
-----------------------	-----

## Dimensions

