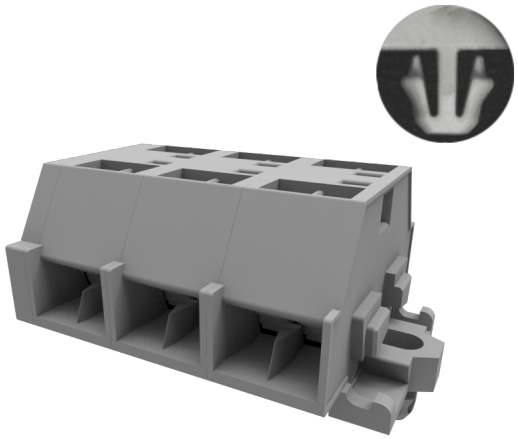


Rated current: 15A

Rated voltage: 300V

Use wire diameter: 28-14AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	300	300	600
Rated Current [A]	15	15	5
Wire Range [AWG]	28～14		

IEC

Rated Voltage [V]	500
Rated Current [A]	24
Soild [mm²]	0.2-2.5
Flexible [mm²]	0.2-2.5
Overvoltage Category	III

TEL: +86-574-63510583 / 63510582 E-mail: cjw@china-wj.com
CIXI WANJIE ELECTRONIC CO.,LTD.
www.xn--chq953c.xn--fiqs8s

Contamination Class	3
Impulse withstand voltage [KV]	6

Material

Insulation Material	PA66
lame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Stripping Length [mm]	8-9

Dimensions

