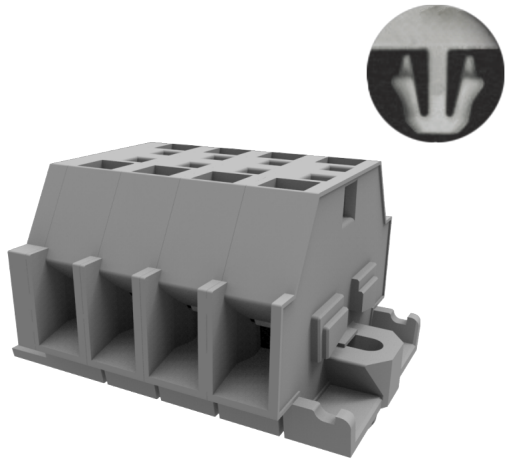


Rated current: 20A

Rated voltage: 300V

Use wire diameter: 28-12AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| Use Group | B | C | D |
|---|---|---|---|
| Rate Voltage [V] | 300 | 300 | 600 |
| Rated Current [A] | 20 | 20 | 5 |
| Wire Range [AWG] | 28～12 | | |

## IEC

| | |
|---|---|
| Rated Voltage [V] | 630 |
| Rated Current [A] | 24 |
| Soild [mm²] | 0.2-4.0 |
| Flexible [mm²] | 0.2-4.0 |
| Overvoltage Category | III |

| | |
|---|---|
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |

## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

## Other Date

| | |
|---|---|
| Stripping Length [mm] | 9-10 |

## Dimensions

