


# GWS4BJ

GWS Spring-cage terminal block

Download Date:2026-03-20

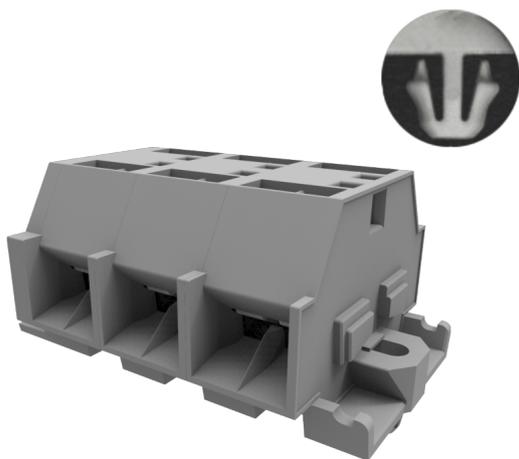

Rated current: 20A

Rated voltage: 300V

Use wire diameter: 28-12AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

Use Group	B	C	D
Rate Voltage [V]	300	300	600
Rated Current [A]	20	20	5
Wire Range [AWG]	28 ~ 12		

## IEC

Rated Voltage [V]	630
Rated Current [A]	24
Soild [mm <sup>2</sup> ]	0.2-4.0
Flexible [mm <sup>2</sup> ]	0.2-4.0
Overvoltage Category	III

Contamination Class	3
Impulse withstand voltage [KV]	8

### Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

### Other Date

Stripping Length [mm]	9-10
-----------------------	------

### Dimensions

