

Use wire diameter: 18-2AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Wire Range [AWG]	18-2
------------------	------

IEC (60947-7-2)

Soild [mm ²]	10.0-35.0
Flexible [mm ²]	10.0-35.0
Flexible with ferrule [mm ²]	10.0-35.0
Overvoltage Category	III
Contamination Class	3

Material


Insulation Material	PA66
---------------------	------

Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated




Other Date

Length/Height/Thickness [mm]	50.0/61.8/15.2
Stripping Length [mm]	16-17
Screw/Torque [N.m]	M6/3.2-3.7

Dimensions

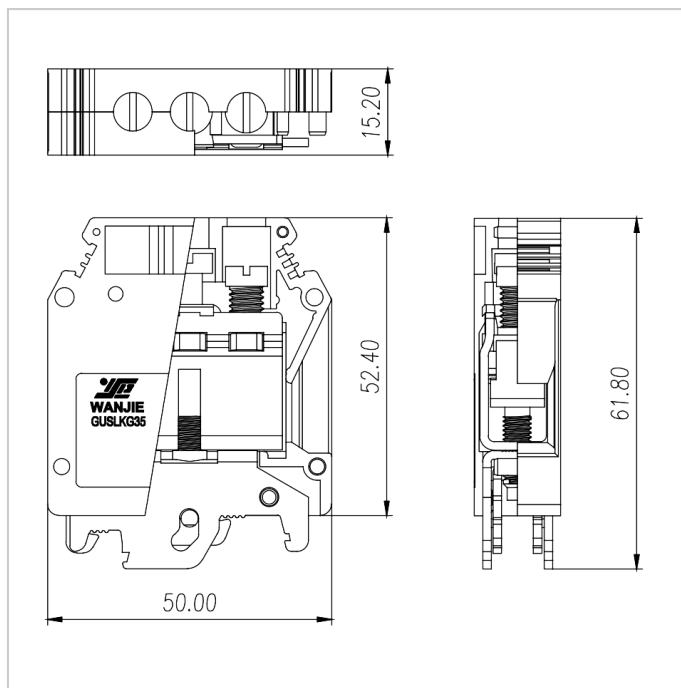

Accessories




MUV10-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B

DGL2-35x7.5C

DGL2-35x7.5D