



M5 Male Panel Mount, PCB Type, Rear Fastened

Rated current: 1A

Rated voltage: 60V



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Connector Series: M5

| | |
|---------------|---------------------|
| Gender | Male |
| Coding | A |
| Locking Type | Fix Screw |
| Mounting Type | Rear Fastened |
| Part No | M05-A**-ST0-M01-BH1 |

Technical Data

| | |
|-----------------------|----------------|
| Standard | IEC61076-2-105 |
| Ambient Temperatur | -25°C~ +85°C |
| Insulation Resistance | ≥100MΩ |
| Contact Resistance | ≤5mΩ |

| | |
|------------------|--------------------|
| IP Class | IP67 |
| Mating Endurance | >100 Mating Cycles |

Material Data


| | |
|---------------------|---------------------------------|
| Connector Carriers | PA |
| Connector Contacts | Copper Alloy With Gold Plated |
| Connector Nut/Screw | Copper Alloy With Nickel Plated |
| Shielding | Unshielded |
| Seal/O-Ring | FKM |

Electrical Data & Mechanical Date

| | | |
|----------------------|-------------|-------|
| Contacts Pin [Pins] | 3 | 4 |
| Rated Current [A] | 1 | 1 |
| Voltage AC/DC [V] | 60/60 | 60/60 |
| Contacts Termination | PCB Version | |

Dimensions

PCB hole diagram

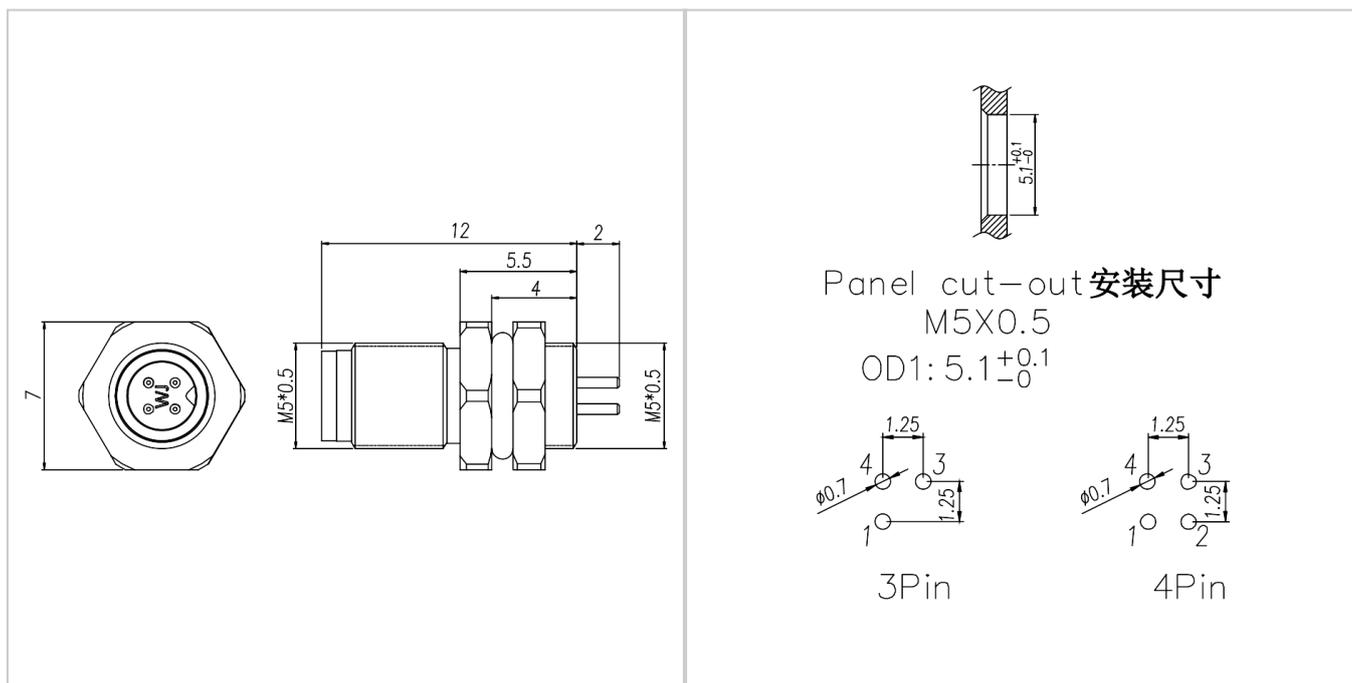

Accessories



M05-A**-ST0-F02-BC*-XXX



M05-A**-RA0-F02-BC*-XXX