

M8 Male Straight Field Assemble, Terminal Locking Screw Type, Unshielded



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Connector Series: M8

| | |
|---------------|---------------------|
| Gender | Male |
| Coding | A |
| Locking Type | Fix Screw |
| Mounting Type | Field Assemble |
| Part No | M08-X**-ST0-M04-PS1 |

Technical Data

| | |
|-----------------------|--------------|
| Standard | IEC61076 |
| Ambient Temperatur | -25°C~+105°C |
| Insulation Resistance | ≥100MΩ |
| Contact Resistance | ≤5mΩ |

| | |
|------------------|--------------------|
| IP Class | IP67 |
| Mating Endurance | >100 Mating Cycles |


Material Data

| | |
|----------------------|---------------------------------|
| Connector Carriers | Plastic (PA) |
| Connector Contacts | Copper Alloy With Gold Plated |
| Connector Nut/Screw | Copper Alloy With Nickel Plated |
| Shielding | Unshielded |
| Contacts Termination | Terminal Locking Screw |
| Seal/O-Ring | FKM |

Electrical Data & Mechanical Date

| | | |
|--------------------------------|---------|-------|
| Contacts Pin [Pins] | 3 | 4 |
| Rated Current [A] | 3 | 3 |
| Voltage AC/DC [V] | 50/60 | 50/60 |
| Wire Range AWG/mm ² | 24/0.25 | |

Dimensions

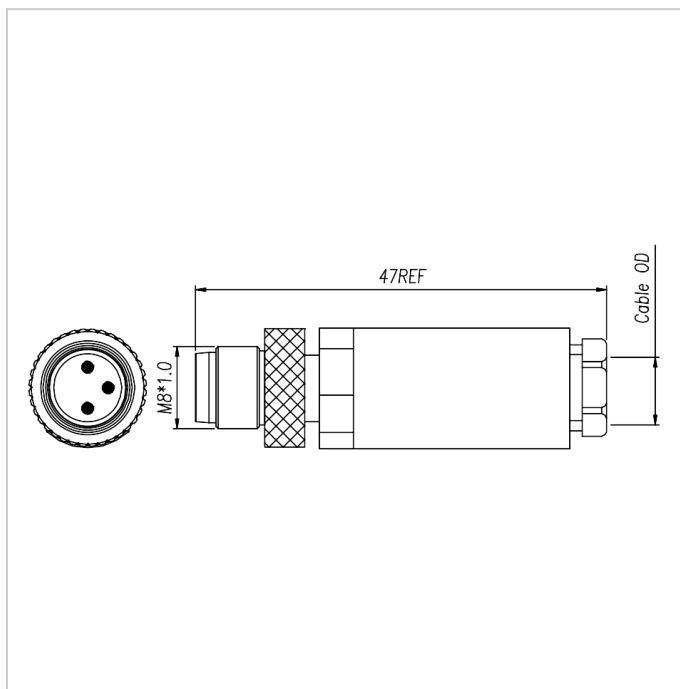

Accessories



M08-X**-ST0-F02-BC*-XXX



M08-X**-RA0-F02-BC*-XXX



M08-X**-ST0-F02-BV*-XXX




M08-X**-ST0-F02-BFM



M08-X**-ST0-F02-BQ3-XXX



M08-X**-ST0-F02-BH2-XXX



M08-X**-ST0-F02-BQ4-XXX



M08-X**-ST0-F02-BQ3



M08-X**-ST0-F02-BH2



M08-X**-ST0-F02-BQ4



M08-X**-ST0-F01-BQ3



M08-X**-ST0-F01-BH2



M08-X**-ST0-F01-BQ4



M08-X**-ST1-F01-BQ3



M08-X**-RA1-F01-BQ3

M08-X**-ST0-F04-PS1

M08-X**-ST2-F04-ZS1