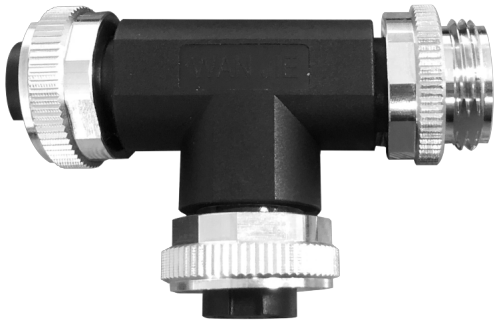


7/8" T-Splitter, Male-Female-Female

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## Connector Series: 7/8″

| | |
|---|---|
| Gender | Male to Female |
| Coding | A |
| Locking Type | Fix Screw |
| Mounting Type | T-Splitter |
| Part No | M87-A**-ST0-MF2-BTF |

## Technical Data

| | |
|---|---|
| Ambient Temperatur | -25℃~+85℃ |
| Insulation Resistance | ≥100MΩ |
| Contact Resistance | ≤5mΩ |
| IP Class | IP67 |

| | |
|---|---|
| Mating Endurance | >100 Mating Cycles |

## Material Data

| | |
|---|---|
| Connector Carriers | PA |
| Connector Contacts | Copper Alloy With Gold Plated |
| Connector Nut/Screw | Copper Alloy With Nickel Plated |
| Shielding | Unshielded |
| Seal/O-Ring | FKM |

## Electrical Data & Mechanical Date

| | | | | |
|---|---|---|---|---|
| Contacts Pin [Pins] | 2 | 3 | 4 | 5 |
| Rated Current [A] | 13 | 13 | 13 | 7 |
| Voltage AC/DC [V] | 300/300 | | | |
| Wire Range AWG/mm² | 18/1.0 | 18/1.0 | 18/1.0 | 20/0.5 |

## Dimensions

