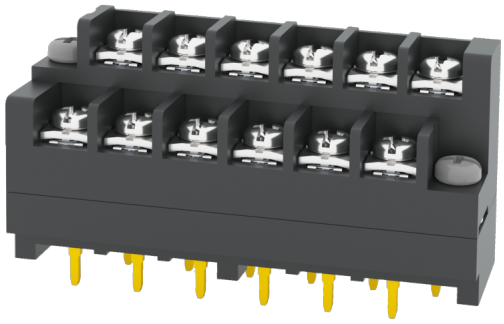


Rated current: 15A

Rated voltage: 300V

Use wire diameter: 22-14AWG

spacing:7.62mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL/CUL

| Use Group | B | C | D |
|---|---|---|---|
| Rate Voltage [V] | 300 | / | 300 |
| Rated Current [A] | 15 | / | 10 |
| Wire Range [AWG] | 22-14 | | |
| Dielectric Voltage-Withstand | 1.6KV | | |


## Material

| | |
|---|---|
| Insulation Material | PBT |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Ni-Au plated |

## Other Date

| | |
|---|---|
| Pitch/Poles [mm]/[P] | 7.62/2*6-2*24 |
| Stripping Length [mm] | 7-8 |
| Screw/Torque(Max)[N.m] | M3/0.5 |
| Operating temperature [℃] | -30～+120 |
| Soldering method | Wave soldering |
| Pin dimensions [mm] | 0.8*1.0 |
| PCB Hole Diameter [mm] | Ø1.6 |

## Dimensions

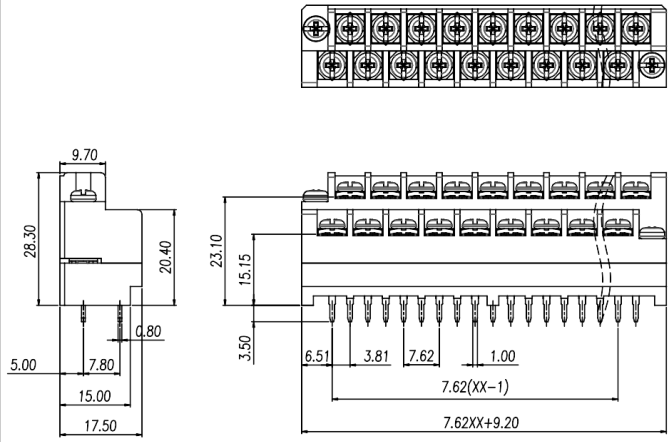


## PCB hole diagram

