

Rated current: 6A

Rated voltage: 150V

Use wire diameter: 26-18AWG

spacing:2.54mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

#### 技术数据-UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	-
Rated Current [A]	6	-	-
Wire Range [AWG]	26-18		
Dielectric Voltage-Withstand	1.3KV		

#### IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	32	160	160
Rated Current [A]	6	6	6

Impulse withstand voltage [KV]	0.8	2.5	2.5
Conductor cross section [mm <sup>2</sup> ]	0.2-0.5		


### Material

Insulation Material	HIGH-TEMPERATURE PLASTICS
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

### Other Date

Pitch/Poles [mm]/[P]	2.54/2*2-2*24
Stripping Length [mm]	7-8
Screw/Torque(Max)[N.m]	-
Operating temperature [°C]	-40 ~ +130

### Dimensions

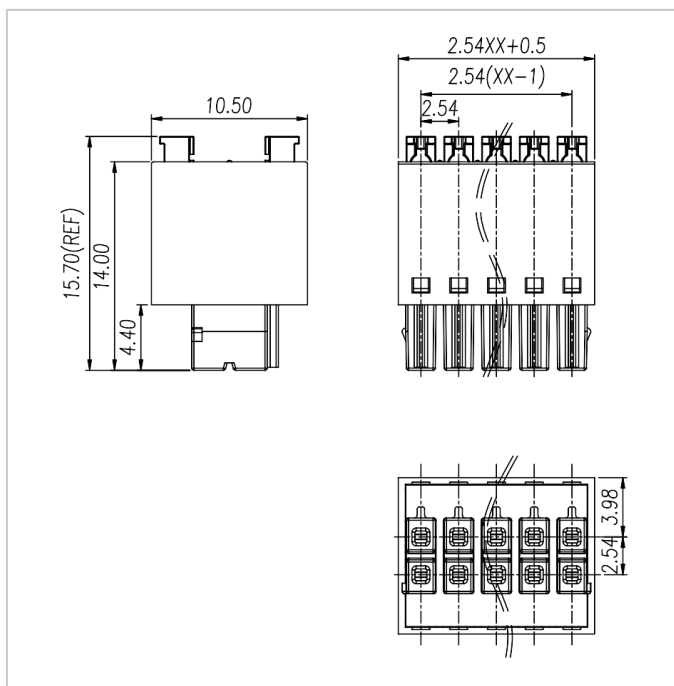


## Accessories



WJ15VDH-THR-2.54



WJ15RDH-THR-2.54



WJ15RDHM-THR-2.54