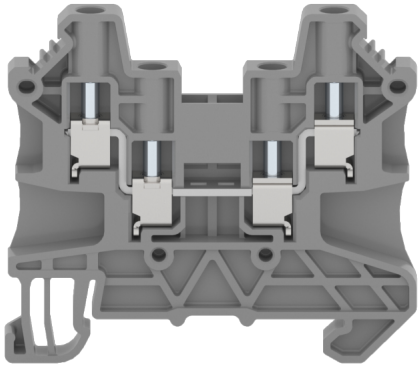


Rated current: 25A

Rated voltage: 600V

Use wire diameter: 26-12AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	600	600	600
Rated Current [A]	25	25	5
Wire Range [AWG]		26～12	

IEC (60947-7-1)

Rated Voltage [V]	1000
Rated Current [A]	24
Soild [mm²]	0.2-4.0
Flexible [mm²]	0.2-2.5
Flexible with ferrule [mm²]	0.25-2.5

TEL: +86-574-63510583 / 63510582 E-mail: cjw@china-wj.com
CIXI WANJIE ELECTRONIC CO.,LTD.
www.xn--chq953c.xn--fiqs8s

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Length/Height/Thickness [mm]	54.4/47.7/5.2
Stripping Length [mm]	8-9
Screw/Torque [N.m]	M2.5/0.4-0.5

Dimensions

