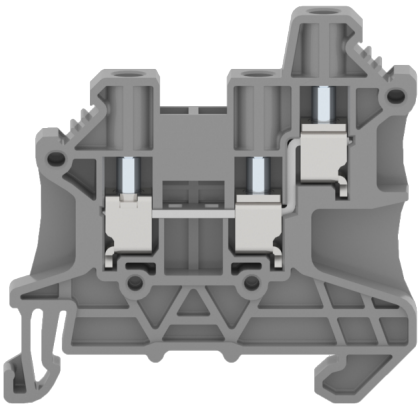


Rated current: 30A

Rated voltage: 600V

Use wire diameter: 26-10AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| Use Group | B | C | D |
|---|---|---|---|
| Rate Voltage [V] | 600 | 600 | 600 |
| Rated Current [A] | 30 | 30 | 5 |
| Wire Range [AWG] | | 26～10 | |

## IEC ( 60947-7-1 )

| | |
|---|---|
| Rated Voltage [V] | 1000 |
| Rated Current [A] | 32 |
| Soild [mm²] | 0.2-6.0 |
| Flexible [mm²] | 0.2-4.0 |
| Flexible with ferrule [mm²] | 0.25-4.0 |

| | |
|---|---|
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |


## Other Date

| | |
|---|---|
| Length/Height/Thickness [mm] | 50.0/47.7/6.2 |
| Stripping Length [mm] | 8-9 |
| Screw/Torque [N.m] | M3.0/0.5-0.6 |


## Dimensions

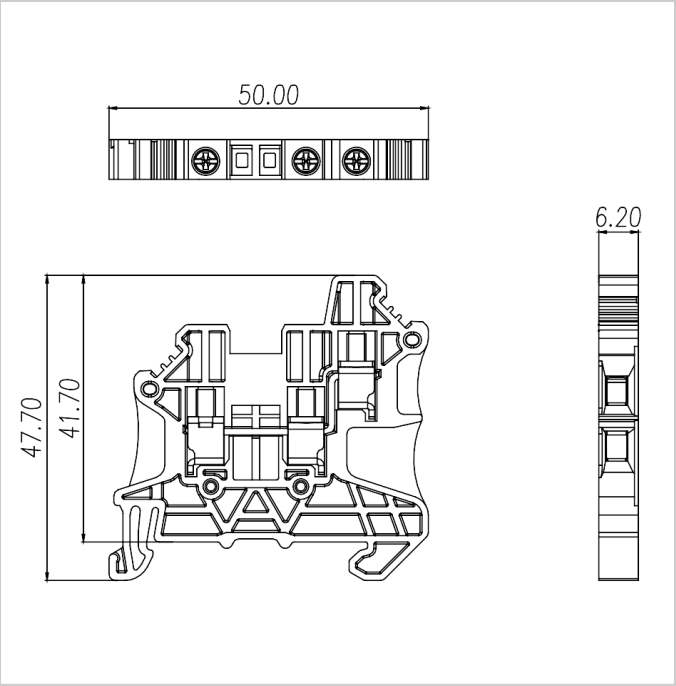

## Accessories




FUVA4-XX



DUT2.5-103



MUV4-10



EB-35




EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D