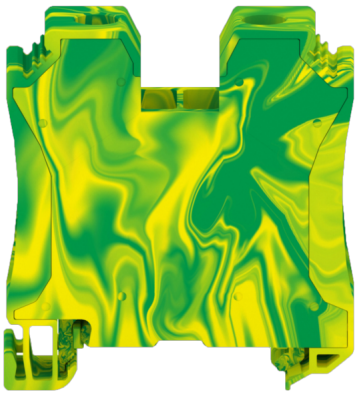


Use wire diameter: 14-1/0AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL ( 1059 )

| Use Group | B | C | D |
|---|---|---|---|
| Wire Range [AWG] | 14-1/0 | | |

## IEC ( 60947-7-1 )

| | |
|---|---|
| Soild [mm²] | 1.5-50.0 |
| Flexible [mm²] | 1.5-50.0 |
| Flexible with ferrule [mm²] | 1.5-35.0 |
| Overvoltage Category | III |
| Contamination Class | 3 |
| Impulse withstand voltage [KV] | 8 |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

## Other Date

| | |
|---|---|
| Length/Height/Thickness [mm] | 56.4/59.9/16.0 |
| Stripping Length [mm] | 18 |
| Screw/Torque [N.m] | M6/2.5-2.6 |


## Dimensions

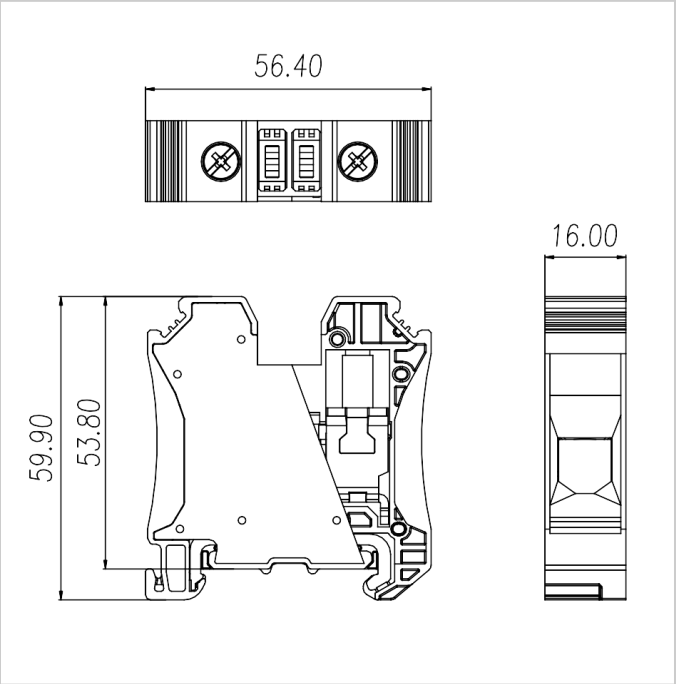


## Accessories



MUT35-05



EB-35




EW-35




EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D