

Rated current: 10A

Rated voltage: 300V

Use wire diameter: 28-12AWG

spacing:5.08mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## 技术数据-UL/CUL

| | | | |
|---|---|---|---|
| 等级 Use Group | B | C | D |
| 额定电压 Rate Voltage [V] | 300 | - | 300 |
| 额定电流 Rated Current [A] | 10 | - | 10 |
| 接线范围 Wire Range [AWG] | 28-12 | | |
| 耐电压 Dielectric Voltage-Withstand | 1.6KV | | |

## 技术参数-IEC

| | | | |
|---|---|---|---|
| 过电压类别 Overvoltage Category | Ⅲ | Ⅲ | Ⅱ |
| 污染等级 Contamination Class | 3 | 2 | 2 |
| 额定电压 Rated Voltage [V] | 250 | 320 | 630 |
| 额定电流 Rated Current [A] | 12 | 12 | 12 |

| | | | |
|---|---|---|---|
| 额定冲击电压 Impulse withstand voltage [KV] | 4 | 4 | 4 |
| 导线截面积[硬/柔] Conductor cross section [mm²] | 0.2-2.5 | | |


## 材料 Material

| | |
|---|---|
| 绝缘材料 Insulation Material | PA66 |
| 阻燃等级 Flame relardant rating | UL94V-0 |
| 导体材料 Conductor Material | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated |


## 一般参数 Other Date

| | |
|---|---|
| 间距/极数 Pitch/Poles [mm]/[P] | 5.08/2-24 |
| 剥线长度 Stripping Length [mm] | 9-10 |
| 螺丝/扭矩 Screw/Torque(Max)[N.m] | - |
| 工作温度 Operating temperature [℃] | -40～+105 |


## Dimensions

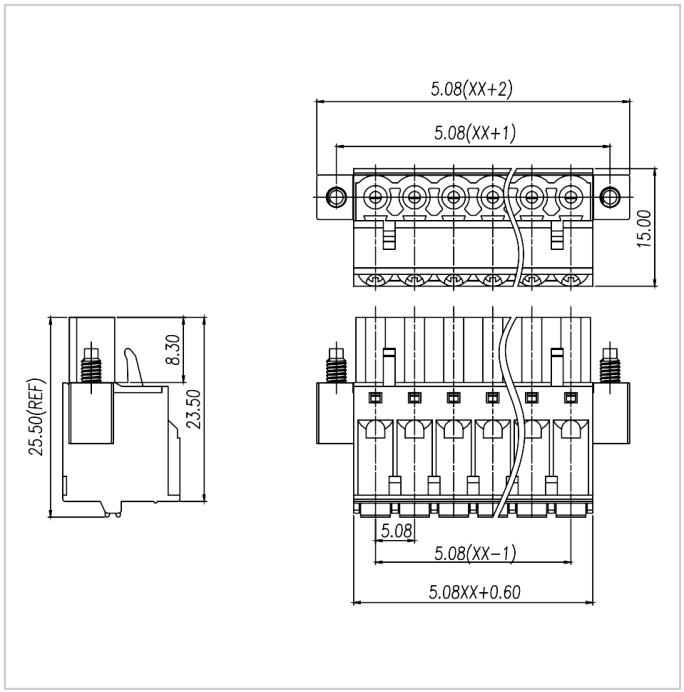


## Accessories



WJ2EDGVM-5.08



WJ2EDGRM-5.08



WJ2EDGRRM-5.08



WJ2EDGVM-THT-5.08



WJ2EDGRM-THT-5.08



WJ2EDGVTM-5.08




WJ2EDGRTM-5.08



WJ2EDGVHM-5.08



WJ2EDGRHM-5.08



WJ2EDGLM-5.08



WJ2EDGKRN-5.08



WJ2EDGKDRN-5.08



WJ2CDGM-5.08

## Matching components



WJ2EDG-PWI