

Rated current: 115A

Rated voltage: 600V

Use wire diameter: 20-2AWG

spacing:15.0mm

Install: Wave soldering

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	600	600	600
Pated Current [A]	115	115	5
Wire Range [AWG]		20～2	
Dielectric Voltage-Withstand		2.2KV	

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	1000	1000	1000
Rated Current [A]	125	125	125

Impulse withstand voltage [KV]	8	8	8
Conductor cross section [mm²]	0.5~35		

Material

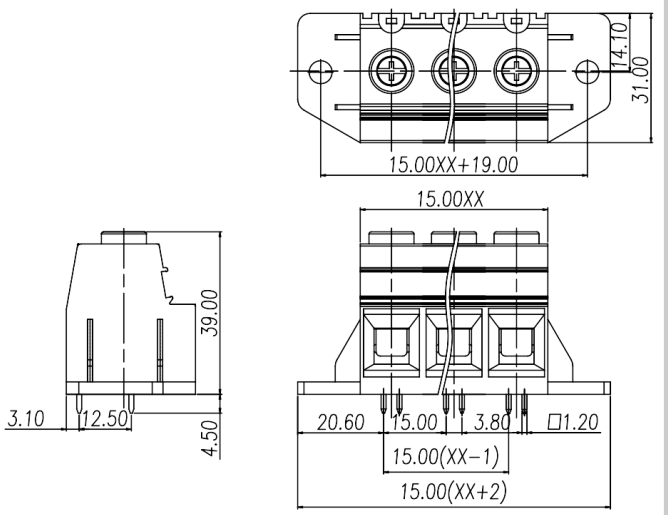
Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

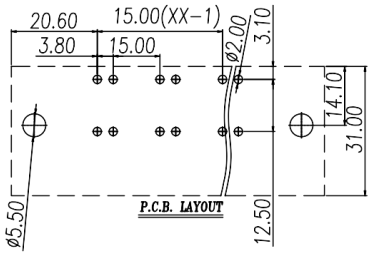
Other Date

Pitch/Poles [mm]/[P]	15.0/2-10
Stripping Length [mm]	17-18
Screw/Torque(Max)[N.m]	M5/2.0
Operating temperature [℃]	-40～+105
Soldering method	Wave soldering
Pin dimensions [mm]	1.2*1.2
PCB Hole Diameter [mm]	Ø2.0

Dimensions

PCB hole diagram


14.10
31.00
15.00XX+19.00
15.00XX
39.00
3.10
12.50
4.50
20.60
15.00
3.80
□1.20
15.00(XX−1)
15.00(XX+2)


20.60
15.00(XX−1)
3.80
15.00
Ø2.00
3.10
14.10
31.00
Ø5.50
P.C.B. LAYOUT
12.50