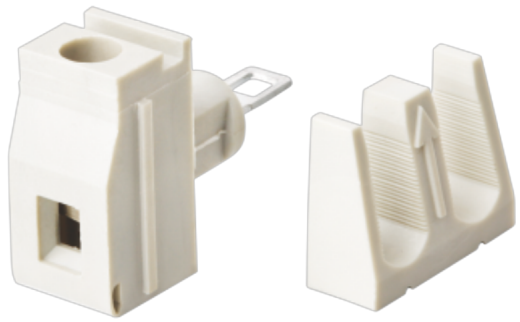


Through-wall Terminal Block

Rated current: 20A

Rated voltage: 300V

Use wire diameter: 26-12AWG

spacing:10.0mm

Install: Wave soldering

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	20	-	10
Wire Range [AWG]	26～12		
Dielectric Voltage-Withstand	2.0KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	250	400	630
Rated Current [A]	24	24	24

Impulse withstand voltage [KV]	6	6	6
Conductor cross section [mm²]	0.5~2.5		


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Date

Pitch/Poles [mm]/[P]	10.0/1-24
Stripping Length [mm]	4.5-5
Screw/Torque(Max)[N.m]	M3/0.5
Operating temperature [℃]	-40～+105
Soldering method	Wave soldering
Pin dimensions [mm]	-
PCB Hole Diameter [mm]	-

Dimensions

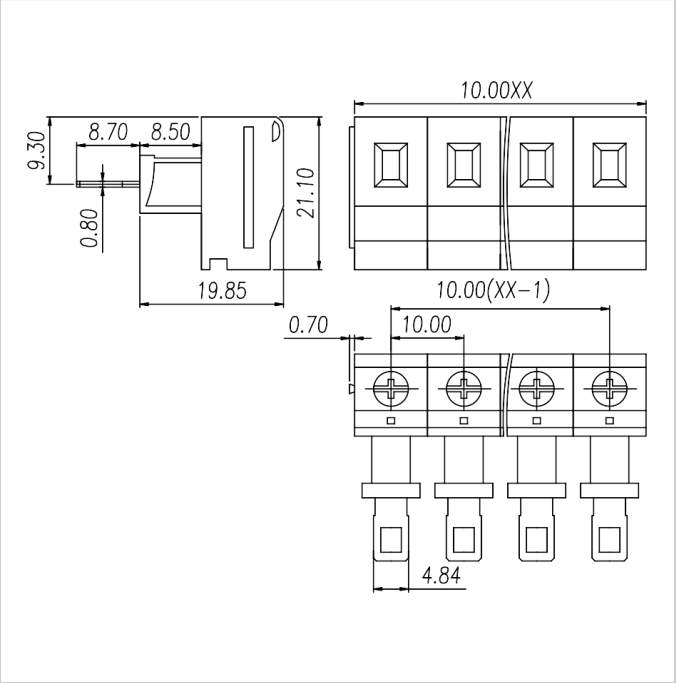
10.00XX
8.70
8.50
9.30
21.10
0.80
19.85
10.00(XX-1)
0.70
10.00
4.84