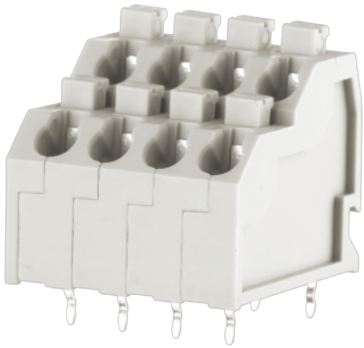


Rated current: 10A

Rated voltage: 300V

Use wire diameter: 20-16AWG

spacing:5.0mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	10	-	10
Wire Range [AWG]	20-16		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	320	320	630
Rated Current [A]	17.5	17.5	17.5

TEL: +86-574-63510583 / 63510582 E-mail: cjw@china-wj.com
CIXI WANJIE ELECTRONIC CO.,LTD.
www.xn--chq953c.xn--fiqs8s

Impulse withstand voltage [KV]	4	4	4
Conductor cross section [mm²]	0.2-1.5		

Material

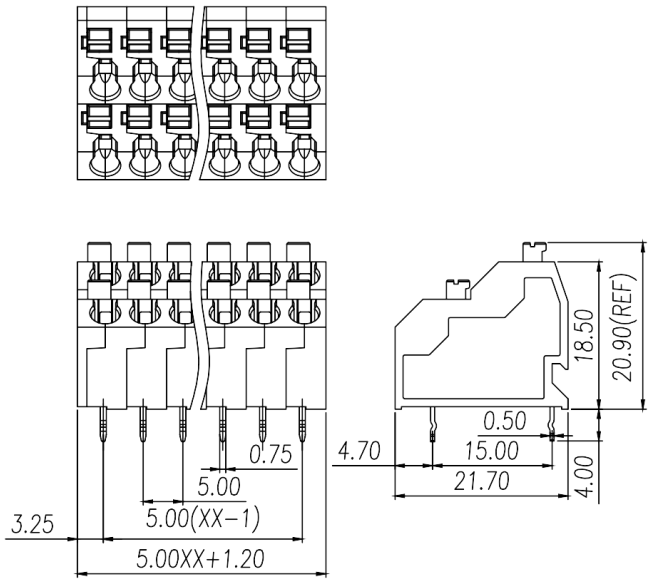
Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Date

Pitch/Poles [mm]/[P]	5.0/2*01-2*30
Stripping Length [mm]	9-10
Screw/Torque(Max)[N.m]	-
Operating temperature [℃]	-40～+105
Soldering method	Wave soldering
Pin dimensions [mm]	0.75*0.5
PCB Hole Diameter [mm]	Ø1.2

Dimensions

PCB hole diagram


0.75
5.00
3.25
5.00(XX-1)
5.00XX+1.20
4.70
0.50
15.00
21.70
18.50
20.90(REF)
4.00


5.00(XX-1)
3.25
5.00
ø1.20
15.00
21.70
4.70
P.C.B. LAYOUT