

Rated current: 15A

Rated voltage: 300V

Use wire diameter: 28-12AWG

spacing:5.0mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL/CUL

| Use Group | B | C | D |
|---|---|---|---|
| Rate Voltage [V] | 300 | 150 | 300 |
| Rated Current [A] | 15 | 15 | 10 |
| Wire Range [AWG] | | 28-12 | |
| Dielectric Voltage-Withstand | | 1.6KV | |

## IEC

| Overvoltage Category | III | III | II |
|---|---|---|---|
| Contamination Class | 3 | 2 | 2 |
| Rated Voltage [V] | 320 | 320 | 630 |
| Rated Current [A] | 12 | 12 | 12 |

| | | | |
|---|---|---|---|
| Impulse withstand voltage [KV] | 4 | 4 | 4 |
| Conductor cross section [mm²] | 0.25-2.5 | | |

## Material

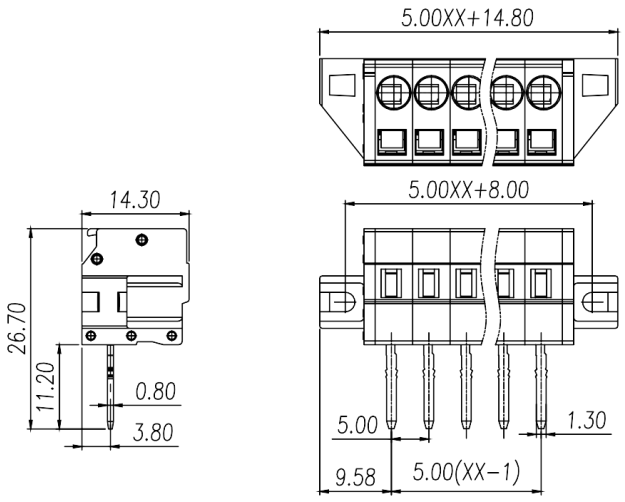
| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |


## Other Date

| | |
|---|---|
| Pitch/Poles [mm]/[P] | 5.0/2-24 |
| Stripping Length [mm] | 8-9 |
| Screw/Torque(Max)[N.m] | - |
| Operating temperature [℃] | -40～+105 |
| Soldering method | Wave soldering |
| Pin dimensions [mm] | 1.3*0.8 |
| PCB Hole Diameter [mm] | Ø1.8 |

## Dimensions

## PCB hole diagram


5.00XX+14.80
14.30
5.00XX+8.00
26.70
11.20
0.80
3.80
5.00
1.30
9.58
5.00(XX−1)


9.58
5.00(XX−1)
5.00
ø1.80
3.80
P.C.B. LAYOUT