

Rated current: 4A  
Rated voltage: 150V  
Use wire diameter: 28-20AWG  
spacing:2.5mm



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

### UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	-
Rated Current [A]	4	-	-
Wire Range [AWG]	28-20		
Dielectric Voltage-Withstand	1.3KV		

### IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	100	160	320
Rated Current [A]	6	6	6

Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section [mm <sup>2</sup> ]	0.25-0.5		


### Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

### Other Data

Pitch/Poles [mm]/[P]	2.5/2-12
Stripping Length [mm]	5-6
Screw/Torque(Max)[N.m]	-
Operating temperature [°C]	-40 ~ +105
Soldering temperature	-
Pin dimensions [mm]	-
PCB Hole Diameter [mm]	-

### Dimensions

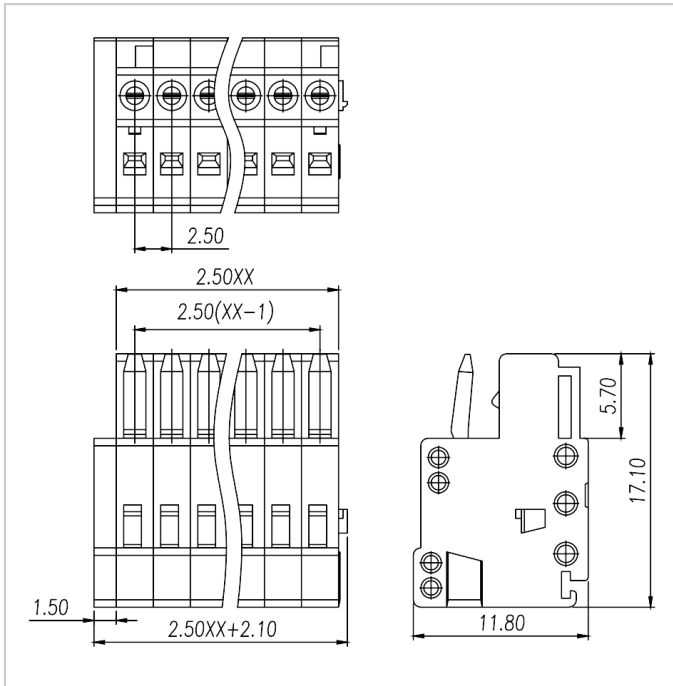

## Accessories



WJ0102-01XX



WJ0102-02XX



WJ0103-01XX