

Rated current: 20A

Rated voltage: 300V

Use wire diameter: 22-12AWG

spacing:10.0mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Material

Screws	M4.0 Steel Ni plated
Pin Header	Copper alloy , Sn plated
Housing	PA66 , UL94V-0

Electrical

Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22-12AWG	2.5mm²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	


TEL: +86-574-63510583 / 63510582 E-mail: cjw@china-wj.com
CIXI WANJIE ELECTRONIC CO.,LTD.
www.xn--chq953c.xn--fiqs8s

Withstanding voltage	AC2000V/1Min

Other Date

Pitch/Poles [mm]/[P]	10.0/2-24
Operating temperature [℃]	-40～+105
Torque	12.24Kgf.cm/1.2N.m/10.6Lb.in

Dimensions

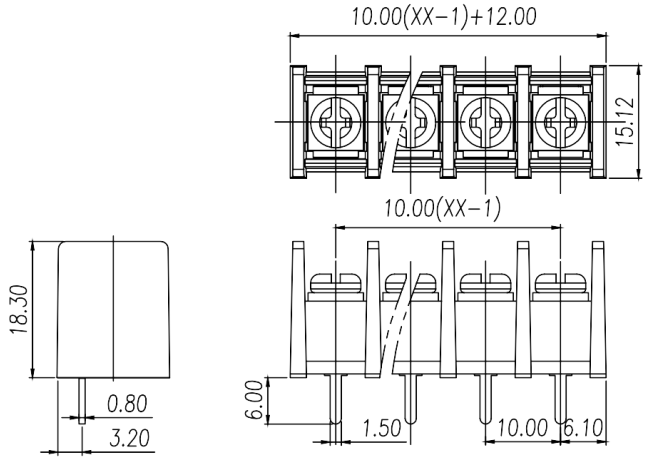

PCB hole diagram

