

额定电流: 30A

额定电压: 600V

使用线径: 22-10AWG

间距:11.6mm

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	600	600	600
额定电流 Rated Current [A]	30	30	5
接线范围 Wire Range [AWG]		20-10	
耐电压 Dielectric Voltage-Withstand		2.2KV	

技术参数-IEC

过电压类别 Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	800	1000	1000
额定电流 Rated Current [A]	41	41	41
额定冲击电压 Impulse withstand voltage [KV]	8	8	8

导线截面积[硬/柔] Conductor cross section [mm²]	6.0

材料 Material

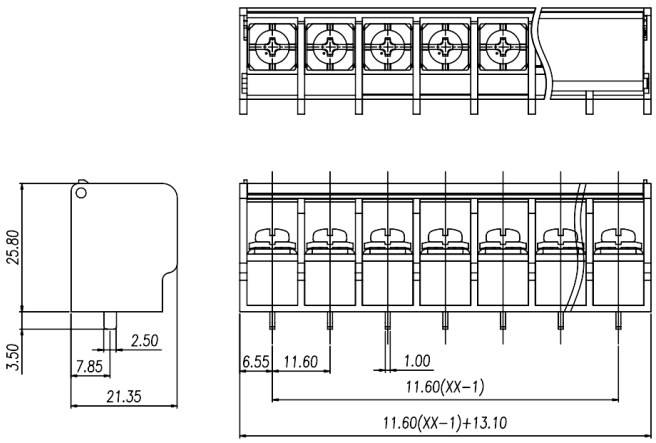
绝缘材料 Insulation Material	PBT
阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

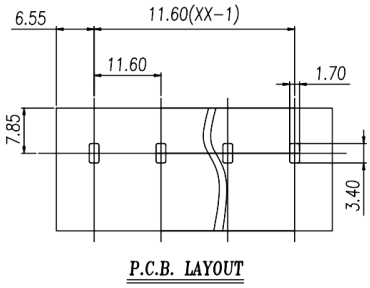
一般参数 Other Date

间距/极数 Pitch/Poles [mm]/[P]	11.6/3,5,7,9,11,13
剥线长度 Stripping Length [mm]	10-13
螺丝/扭矩 Screw/Torque(Max)[N.m]	M4/1.2
工作温度 Operating temperature [℃]	-40～+130
焊接方式 Soldering method	Wave soldering
引针尺寸 Pin dimensions [mm]	1.0*2.5
PCB板孔径 PCB Hole Diameter [mm]	1.7*3.4

尺寸图

PCB开孔图


25.80
3.50
2.50
7.85
21.35
6.55
11.60
1.00
11.60(XX-1)
11.60(XX-1)+13.10


6.55
11.60(XX-1)
11.60
1.70
7.85
3.40

P.C.B. LAYOUT