


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

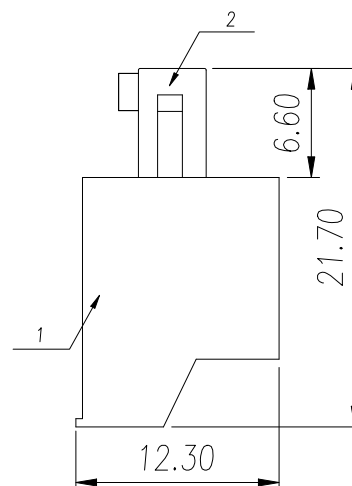

6	Screw	Steel	M2/Zn Plated
5	Cage	Steel	M2/Zn Plated
4	Block	Steel	Zn Plated
3	Clamp	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD									
REV.	ESCRIPTION				ECN No.	APPROVED	DATE		
0	新发行					YaoFei	24.02.27		
UL/CUL 技术参数 UL/CUL Technical Data 									
等 级 Use Group					B	C	D		
额定电压 Rated Voltage [V]					300	-	300		
额定电流 Rated Current [A]					8	-	8		
接线范围 Wire Range					28-16				
单/多芯线 Solid/Stranded [AWG]									
耐电压 Withstanding Voltage					1600V/1Min				
IEC 技术参数					IEC61984				
IEC Technical Data									
过电压类别 Overvoltage Category					III	III	II		
污染等级 Contamination Class					3	2	2		
额定电压 Rated Voltage [V]					160	160	320		
额定电流 Rated Current [A]					7	7	7		
额定冲击电压 Impulse withstand voltage [KV]					2.5	2.5	2.5		
导线截面积 Conductor cross section					0.5-1.5				
硬质/柔性导线 Solid/ flexible [mm²]									
一般参数 Other Data									
间距 Pitch /极数 Poles [mm] / [P]					3.81 / 02~24				
剥线长度 Stripping Length [mm]					6~7				
螺丝 Screw/扭矩 Torque(Max) [N.m]					M2/0.2				
工作温度 Operating temperature [°C]					-40~105				
符合RoHS环保要求									