

1

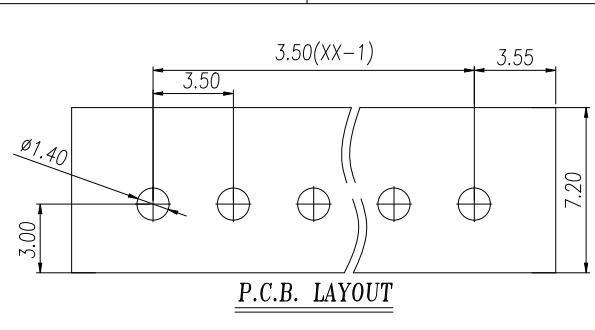
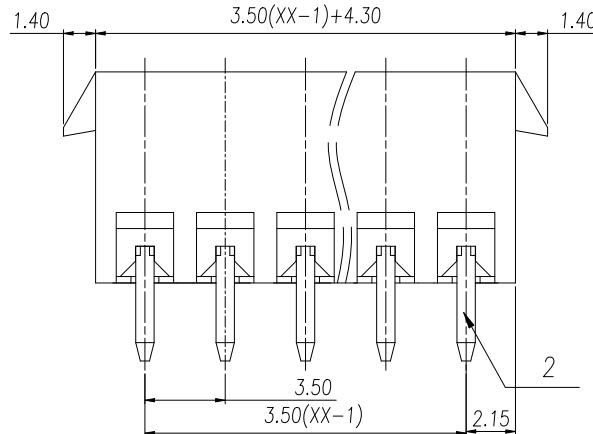
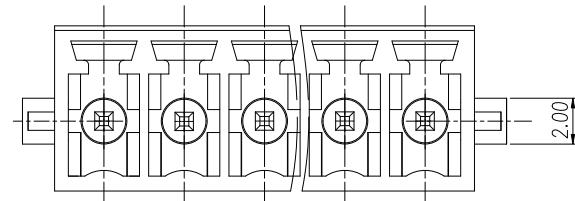
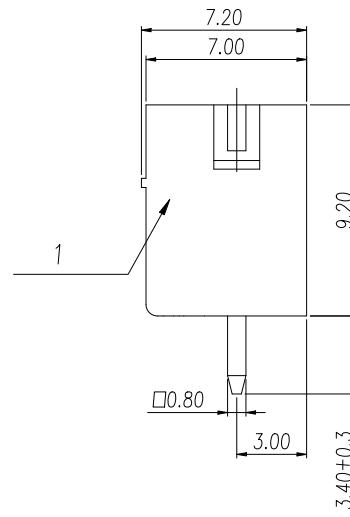
2

3

4

5

6

P.C.B. LAYOUT

General Tolerances										—			
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 200	to 10	over 10 to 100	over 100 to 200	—	□	+
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	—	—	—

REVISION RECORD					
REV.	DESCRIPTION		ECN No.	APPROVED	DATE
0	新发行			YaoFei	23.11.24
	UL/CUL 技术参数	UL1059			
	UL/CUL Technical Data				
	等 级 Use Group	B	C	D	
	额定电压 Rated Voltage [V]	300	-	300	
	额定电流 Rated Current [A]	8	-	8	
	接线范围 Wire Range				
	单/多芯线 Solid/Stranded [AWG]				
	耐电压 Withstanding Voltage	1600V/1Min			
	IEC 技术参数	IEC 61984			
	IEC Technical Data				
	过电压类别 Overvoltage Category	III	III	II	
	污染等级 Contamination Class	3	2	2	
	额定电压 Rated Voltage [V]	160	160	250	
	额定电流 Rated Current [A]	7	7	7	
	额定冲击电压 Impulse withstand voltage [kV]	2.5	2.5	2.5	
	导线截面积 Conductor cross section				
	硬质/柔性导线 Solid/flexible [mm²]	-			
	一般参数 Other Data				
	间距 Pitch [mm]	3.5			
	极数 Poles [P]	02-24			
	工作温度 Operating temperature [°C]	-40~105			
	符合RoHS环保要求				

DES.	YaoFei	DATE	23.11.24	UNITS	mm	THIRD ANGLE PROJECTION	⊕
CHK.	YangHJ	DATE	23.11.24	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.11.24	SCALE	3: 1	DRAWING TYPE: SP-03	REV 0
 慈溪市万捷电子有限公司 WANJIE CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ15EDGVG-3.5-XXP-1Y-00A	

1

2

3

4

5

FOR-0371 Rev.1.0