
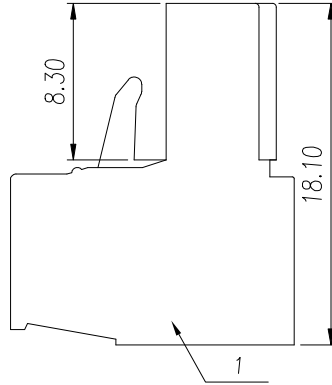


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

1	2	3	4	5	6
---	---	---	---	---	---

REVISION RECORD				
REV.	ESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		CY	25.03.14

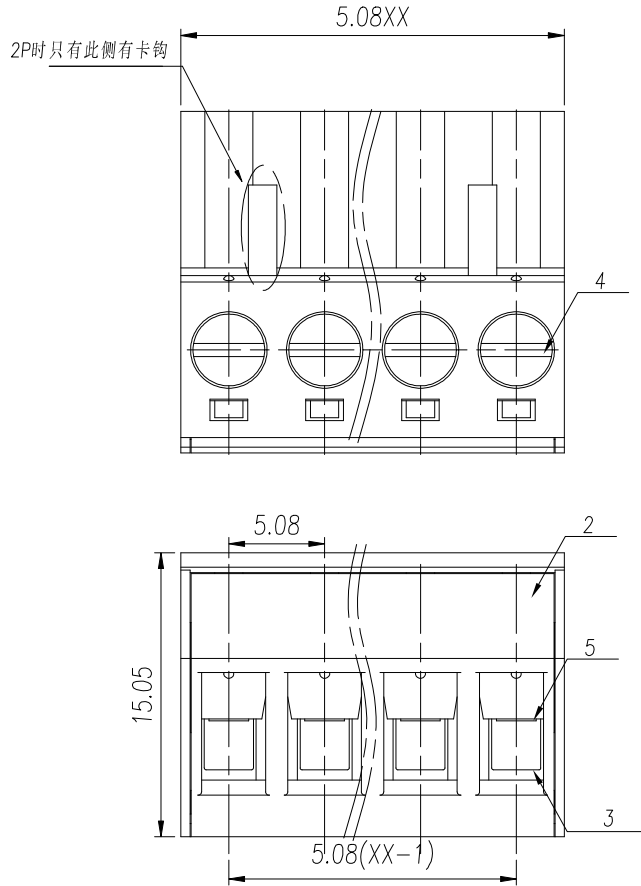

UL/CUL 技术参数		UL/CUL Technical Data				
等 级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	15	-	10	
接线范围	Wire Range		28-12			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	250	320	630	
额定电流	Rated Current	[A]	15	15	15	
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0	
导线截面积	Conductor cross section		0.2-2.5			
硬质/柔性导线	Solid/ flexible	[mm²]				
一般参数 Other Data						
间距 Pitch /极数	Poles	[mm] / [P]	5.08 / 02-24			
剥线长度	Stripping Length	[mm]	7~8			
螺丝 Screw/扭矩	Torque(Max)	[N.m]	M3/0.5			
工作温度	Operating temperature	[°C]	-40~105			
符合RoHS环保要求						

General Tolerances								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Clamp	Copper Alloy	Sn Plated	DES.	CY	DATE	25.03.14	UNITS	mm	THIRD ANGLE PROJECTION			
4	Screw	Steel	M3/Zn Plated	CHK.	YangHJ	DATE	25.03.14	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
3	Cage	Copper Alloy	Ni Plated	APP.	JASON	DATE	25.03.14	SCALE	3:1	DRAWING TYPE: SP-03		REV	0
2	Cover	PA66	UL94V-0	 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.:			
1	Housing	PA66	UL94V-0							WJ2EDGK-5.08-XXP-1Y-00A			
ITEM	NAME OF PART	MATERIAL	NOTES										