


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经许可复制或传播本文件内容，侵犯者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

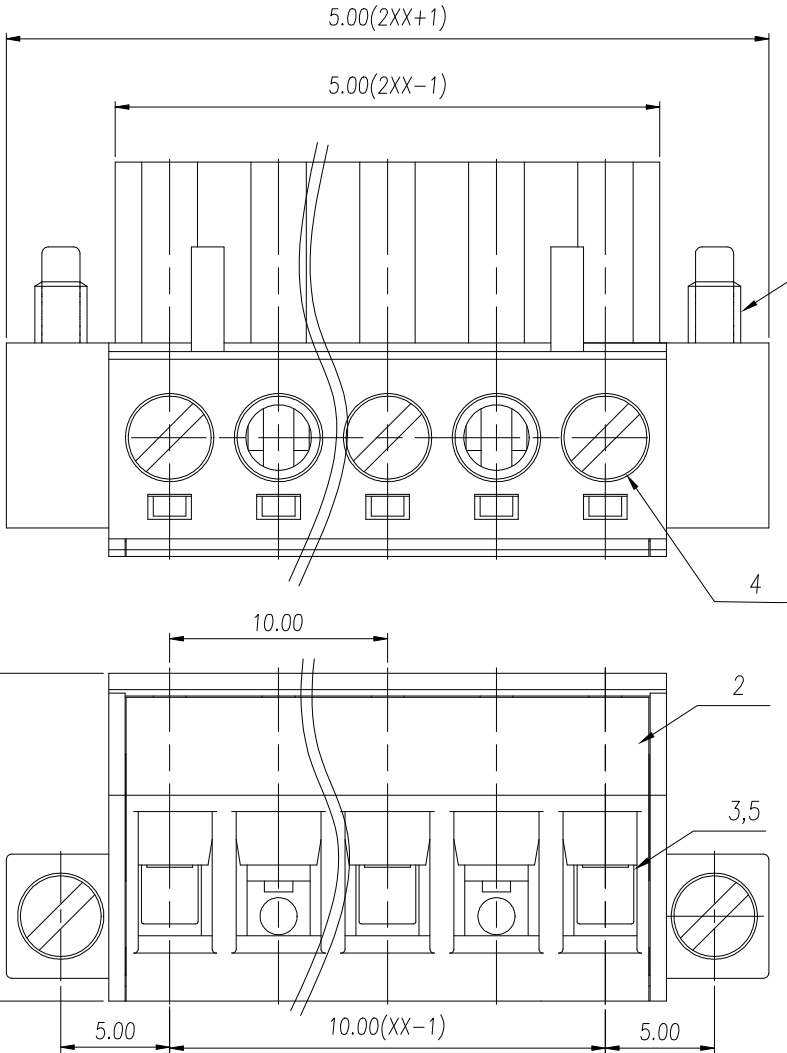

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

6	Screw 2	Steel	M2.5/Zn Plated
5	Clamp	Copper Alloy	Sn Plated
4	Screw 1	Steel	M3/Zn Plated
3	Cage	Copper Alloy	M3/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	CY	DATE	25.03.13	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	25.03.13	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	JASON	DATE	25.03.13	SCALE	3:1	DRAWING TYPE: SP-03	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ2EDGKM-10.0-XXP-24-00A	
WANJIE						REV 0	

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		CY	25.03.13

UL/CUL 技术参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围	Wire Range	28-12		
单 / 多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	2200V/1Min		
IEC 技术参数		IEC61984		
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	15	15	15
额定冲击电压	Impulse withstand voltage [KV]	8.0	8.0	8.0
导线截面积	Conductor cross section	0.2-2.5		
硬质 / 柔性导线	Solid/ flexible [mm²]			
一般参数 Other Data				
间距 Pitch / 极数 Poles	[mm] / [P]	10.0 / 02~12		
剥线长度	Stripping Length [mm]	7~8		
螺丝 Screw/ 扭矩 Torque(Max)	[N.m]	M3/0.5		
工作温度	Operating temperature [°C]	-40~105		