


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除经给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。 本公司保留对涉及发明、实用新型和小发明专利的所有权利。

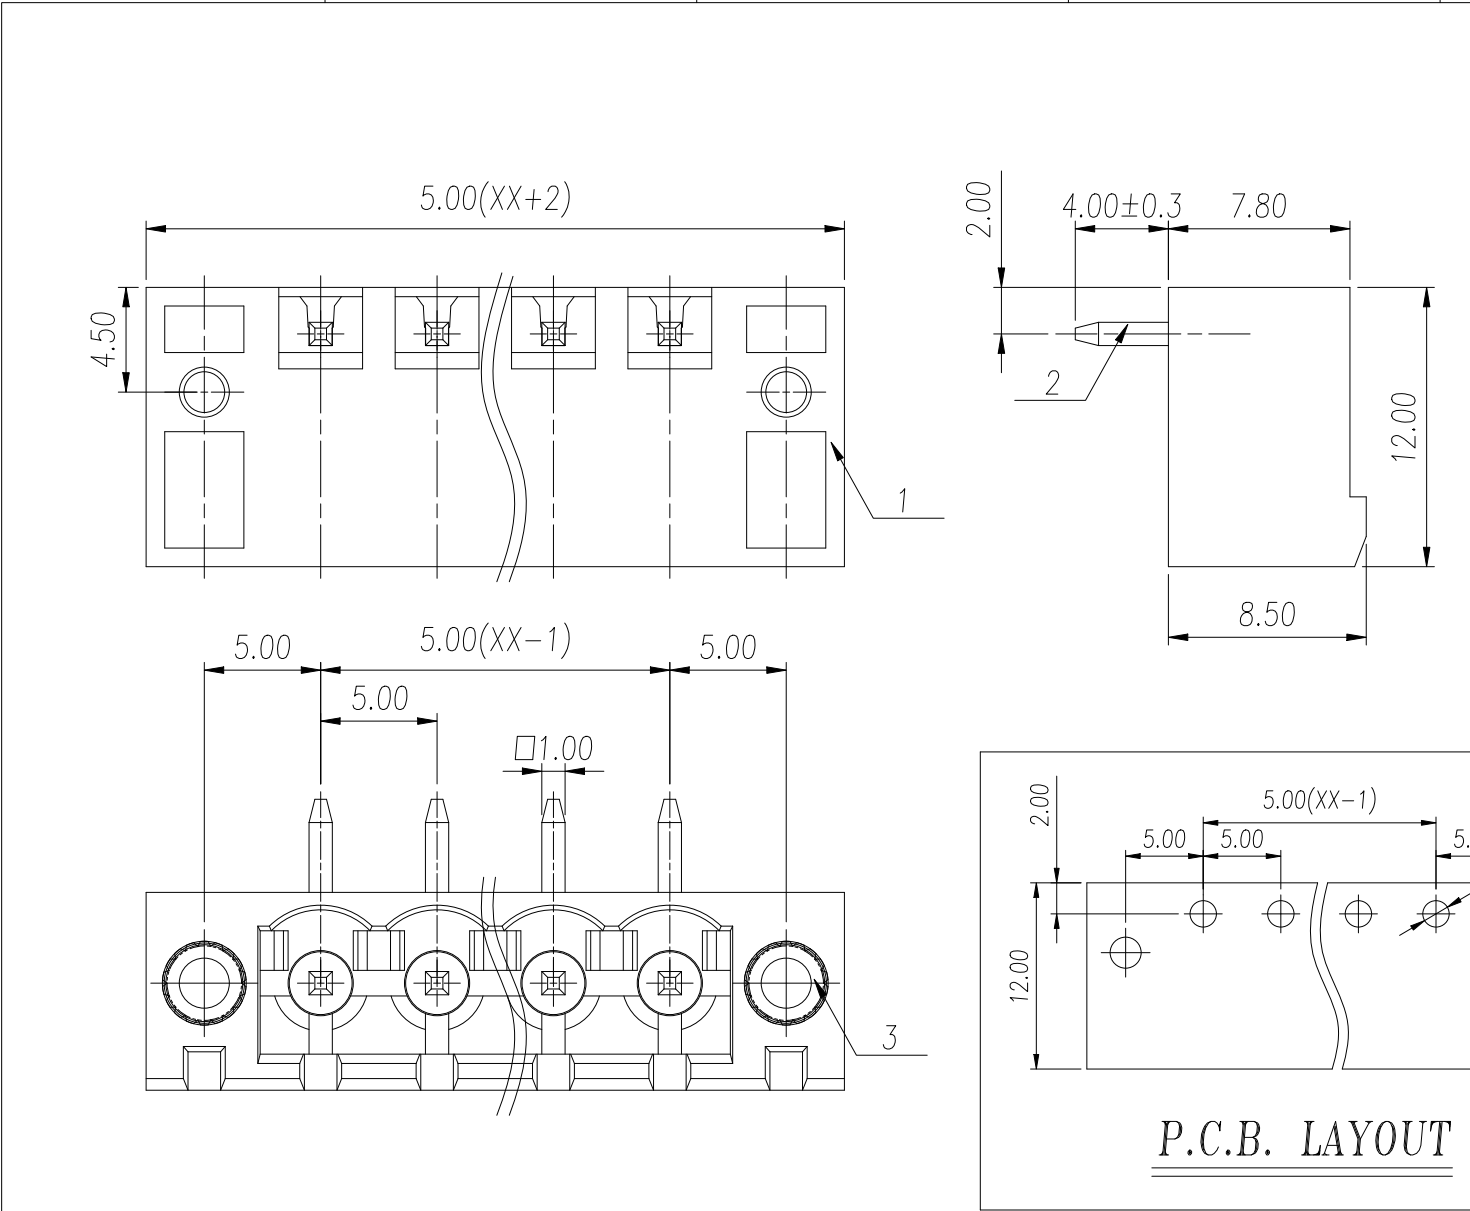

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

ITEM	NAME OF PART	MATERIAL	NOTES
3	Nut	Copper Alloy	M2.5
2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0

DES.	YaoFei	DATE	24.01.22	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	24.01.22	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	24.01.22	SCALE	3:1	DRAWING TYPE: SP-03	REV 0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ2EDGRM-5.0-XXP-1Y-00A	

REVISION RECORD					
REV.	ESCRPTION		ECN No.	APPROVED	DATE
0	新发行			YaoFei	24.01.22
UL/CUL 技术参数 UL/CUL Technical Data 等 级Use Group 额定电压Rated Voltage [V] 额定电流Rated Current [A] 接线范围Wire Range 单/多芯线Solid/Stranded [AWG] 耐电压Withstanding Voltage IEC 技术参数 IEC Technical Data 过电压类别Overvoltage Category 污染等级Contamination Class 额定电压Rated Voltage [V] 额定电流Rated Current [A] 额定冲击电压Impulse withstand voltage [KV] 导线截面积Conductor cross section 硬质/柔性导线Solid/ flexible [mm²] 一般参数Other Data 间距Pitch /极数Poles [mm] / [P] 工作温度Operating temperature [°C] 焊锡温度Soldering temperature 引针尺寸Pin Dimensions [mm] PCB板孔径PCB Hole Diameter [mm] 符合RoHS环保要求			UL® UL		
			B	C	D
			300	-	300
			15	-	10
			-		
			1600V/1Min		
			III III II		
			3	2	2
			250	320	630
			15	15	15
4.0	4.0	4.0			
-					
5.0 / 02~24					
-40~105					
260°C/5S					
1.0*1.0					
Ø1.7					

00

φ1.70

4.50