
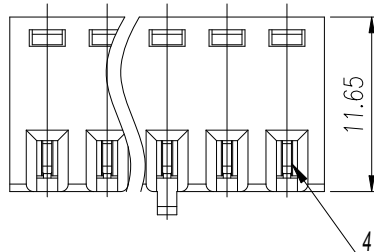
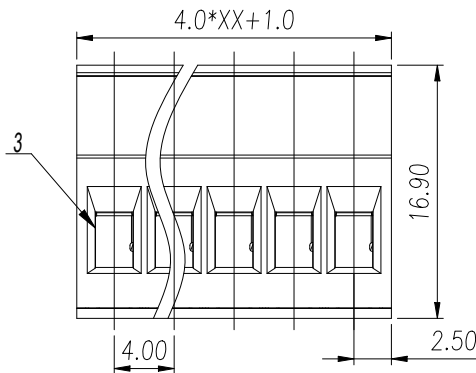
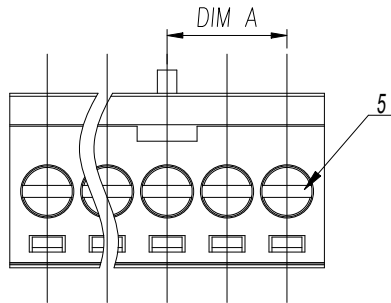
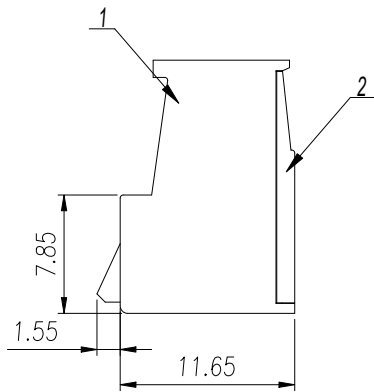


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非经予明确授权, 否则禁止转让、复制、利用、交流本文件内容。 侵犯者将承担赔偿责任。 买购者须对涉及发明、实用新型和外观设计的所有权利。

线数P	DIM A(mm)
2/3	4.0
4/5	8.0
6/7	12.0
8/9	16.0
10/11	20.0
12/13	24.0
14/15	28.0
16/17	32.0
18/19	36.0
20/21	40.0
22/23	44.0
24	48.0



General Tolerances								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	24.01.15

UL/CUL 技术参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	/	300
额定电流	Rated Current [A]	15	/	10
接线范围	Wire Range	30~14		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	320
额定电流	Rated Current [A]	17.5		
额定冲击电压	Impulse withstand voltage [KV]	4.0		
导线截面积	Conductor cross section	0.2-2.5		
硬质/柔性导线	Solid/ flexible [mm ²]			
一般参数 Other Data				
间距	Pitch [mm]	4.0		
极数	Poles [P]	02-24		
剥线长度	Stripping Length [mm]	6~7		
螺丝	Screw	M2.5		
扭矩	Torque(Max) [N.m]	0.4		
工作温度	Operating temperature [°C]	-40~105		
符合RoHS环保要求				
5	Screw	Steel	M2.5/Zn Plated	
4	Clamp	Copper Alloy	Sn Plated	
3	Cage	Copper Alloy	M2.5/Ni Plated	
2	Cover	PA66	UL94V-0	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	

DES.	YuCZ	DATE	24.01.15	UNITS	mm	THIRD ANGLE PROJECTION		⌀	⌵
CHK.	YangHJ	DATE	24.01.15	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
APP.	JASON	DATE	24.01.15	SCALE	2:1	DRAWING TYPE: SP-03		REV	V0
WANJIE 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ2EDGKJ-4.0-XXP-1Y-00A			