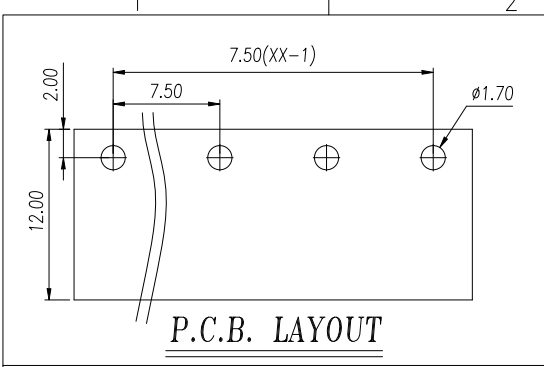
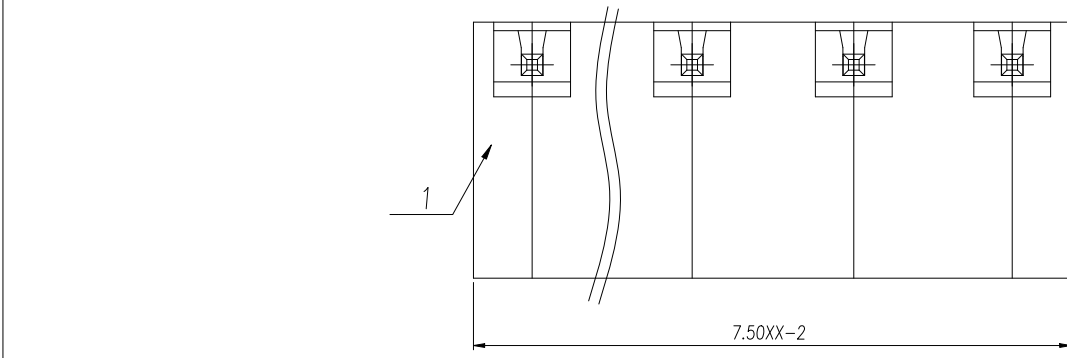
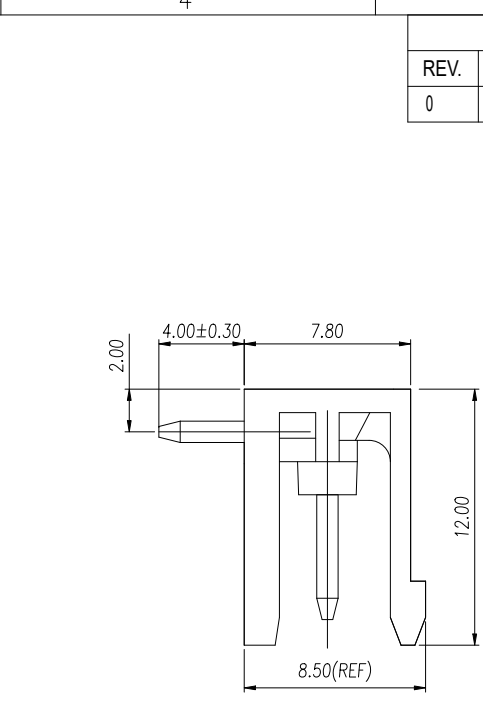
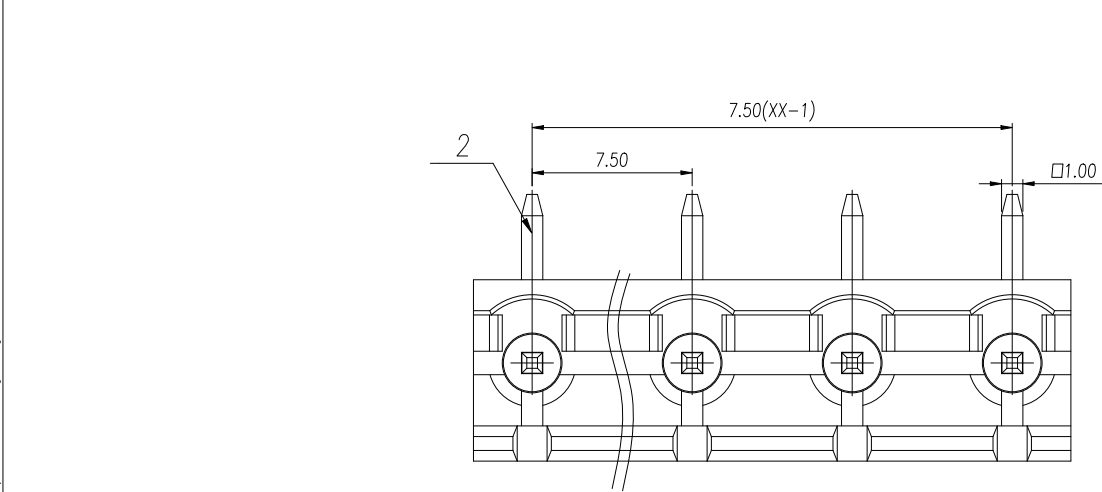


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除特别声明外，未经许可，任何单位和个人不得擅自复制、传播、利用、交流本文件的内容。侵犯者将承担赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

1		2		3		4		5		6			
								REVISION RECORD					
								REV.	DESCRIPTION	ECN No.	APPROVED	DATE	
0		新发行							YaoFei	24.01.22			
								UL/CUL 技术参数					
								UL/CUL Technical Data					
								等级	Use Group		B	C	D
								额定电压	Rated Voltage	[V]	300	-	300
								额定电流	Rated Current	[A]	15	-	10
								接线范围	Wire Range		-		
								单/多芯线	Solid/Stranded	[AWG]			
								耐压	Withstanding Voltage		1600V/1Min		
								IEC 技术参数					
								IEC Technical Data					
								过电压类别	Overvoltage Category		III	III	II
								污染等级	Contamination Class		3	2	2
								额定电压	Rated Voltage	[V]	400	630	630
								额定电流	Rated Current	[A]	15	15	15
								额定冲击电压			6.0	6.0	6.0
								Impulse withstand voltage	[KV]				
								导线截面积	Conductor cross section		-		
								硬质/柔性导线	Solid/flexible	[mm²]			
								一般参数 Other Data					
								间距	Pitch /极数	Poles	[mm]/[P]	7.5 / 02~24	
								工作温度	Operating temperature	[°C]	-40~105		
								焊锡温度	Soldering temperature		260°C/5S		
								引脚尺寸	Pin Dimensions	[mm]	1.0*1.0		
								PCB板孔径	PCB Hole Diameter	[mm]	Ø1.7		
								符合RoHS环保要求					
General Tolerances													
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to 10	over 10	over 100			
		to 10	to 30	to 60	to 100	to 160	to 100		to 100	to			
tolerance		±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		
1		2		3		4		5		FOR-0371 Rev.1.0			