
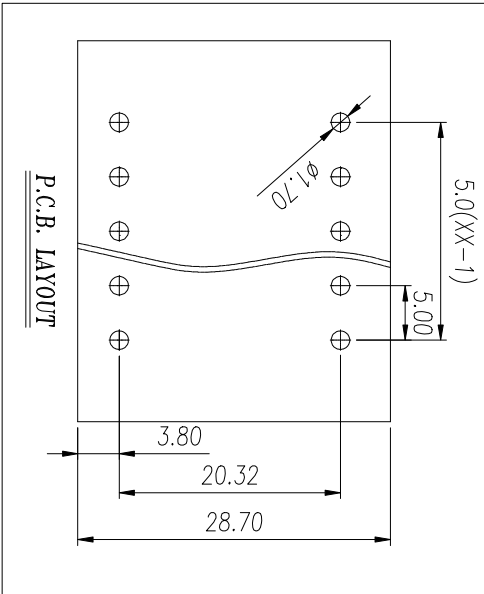
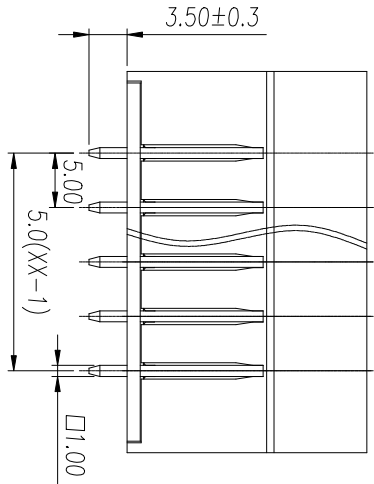
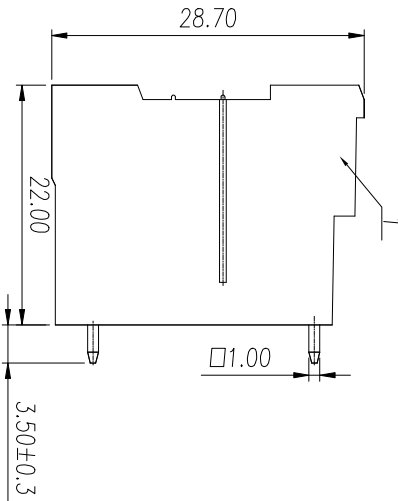


REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED
V0	新发行	YUCZ	23.12.11

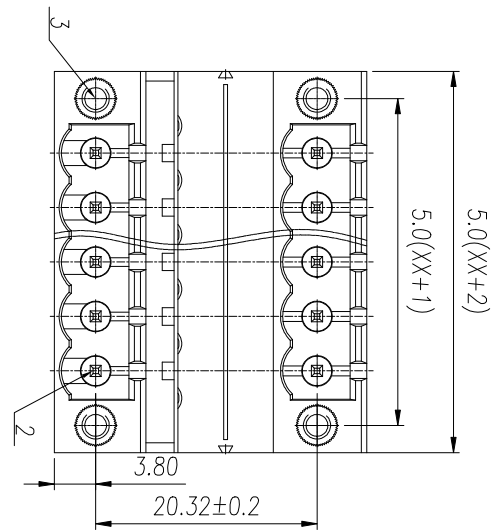

UL/CUL 技术参数		eplus			
UL/CUL Technical Data					

等级	Use Group	B	C	D
额定电压	Rated Voltage	[V]	300	- 300
额定电流	Rated Current	[A]	15	- 10
接线范围	Wire Range			
单/多芯线	Solid/Stranded	[AWG]	-	
耐电压	Withstanding Voltage	1600V/Min		

IEC 技术参数		IEC61984			
IEC Technical Data					

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	[V]	250	320
额定电流	Rated Current	[A]	10	10
额定冲击电压	Impulse withstand voltage	[kV]	4.0	4.0
导线截面积	Conductor cross section			
硬质/柔性导线	Solid/flexible	[mm ²]		

导线截面积	Conductor cross section
硬质 / 柔性导线	Solid / flexible
一般参数	Other Data
间距 Pitch / 极数 Poles	[mm] / [p]
工作温度 Operating temperature	[°C]
焊接温度 Soldering temperature	
符合RoHS环保要求	

3	NUT	Copper Alloy	M2.5
2	Pin 1	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YUCZ	DATE	23.12.11	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	YangHJ	DATE	23.12.11	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	23.12.11	SCALE	3:2	DRAWING TYPE: SP-03	REV V0
				嘉溪市万捷电子有限公司 CXM WANJIE ELECTRONIC CO.,LTD			
PART NO.:				WJ2EDGCVHM-5.0-2*XP-1Y-00A			

General Tolerances

variable range	6 to 6	10 to 10	30 to 30	60 to 60	100 to 100	160 to 160	0.10 to 0.10	0.30 to 0.30	0.60 to 0.60
Tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30