
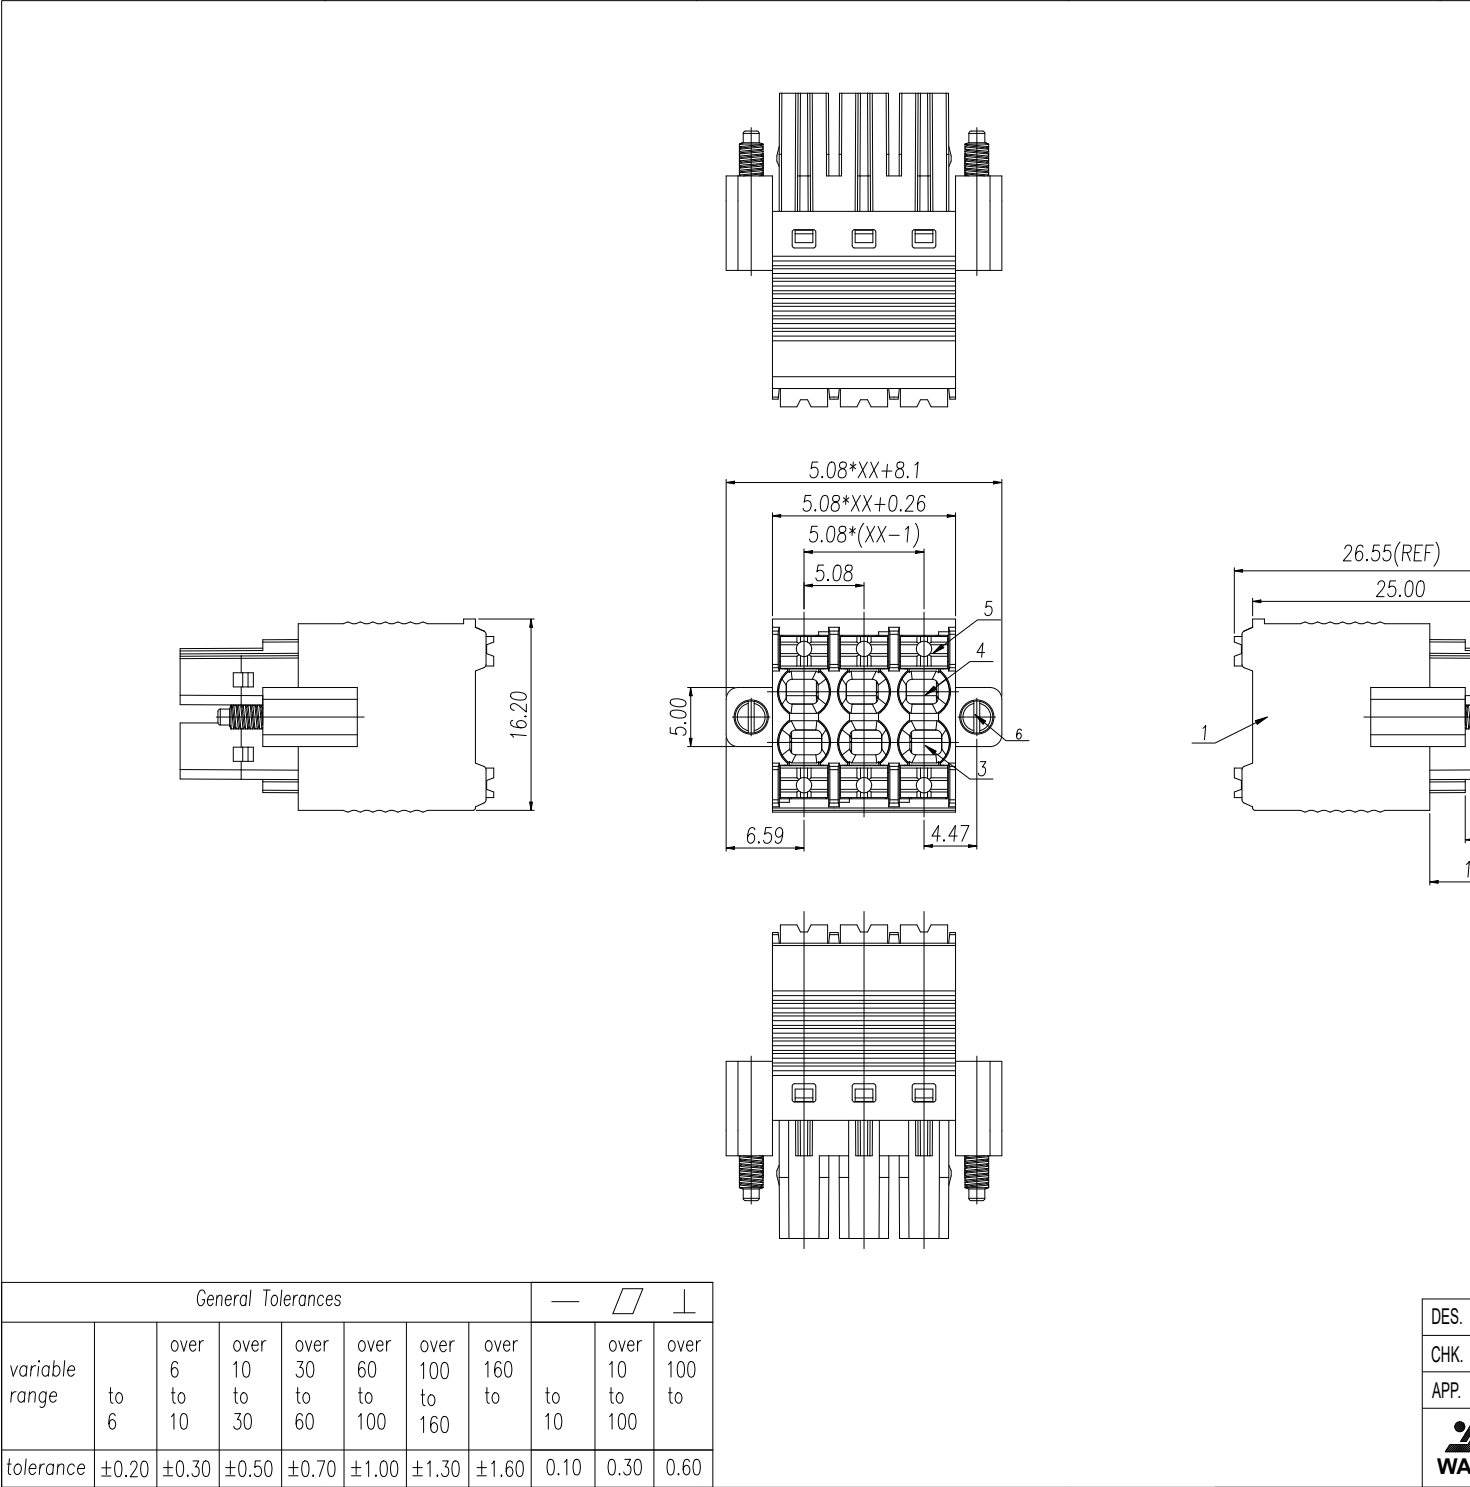


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权,否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。 本公司保留对涉及发明、实用新型和外观专利的所有权利。



REVISION RECORD						
REV.	ESCRIPTION			ECN No.	APPROVED	DATE
0	新发行				YaoFei	24.09.27

	UL/CUL 技术参数				
	UL/CUL Technical Data				
	等级	Use Group	B	C	D
	额定电压	Rated Voltage [V]	300	-	300
	额定电流	Rated Current [A]	10	-	10
	接线范围	Wire Range	24-16		
	单/多芯线	Solid/Stranded [AWG]			
	耐电压	Withstanding Voltage	1600V/1Min		
	IEC 技术参数				
	IEC Technical Data				
	过电压类别	Overvoltage Category	III	III	II
	污染等级	Contamination Class	3	2	2
	额定电压	Rated Voltage [V]	250	400	630
	额定电流	Rated Current [A]	8	8	8
	额定冲击电压	Impulse withstand voltage [KV]	4	4	4
	导线截面积	Conductor cross section	0.2-2.5/02-1.5		
	硬质/柔性导线	Solid/ flexible [mm²]			

一般参数 Other Data				
间距 Pitch /极数 Poles	[mm] / [P]	5.08 / 2*02~2*14		
剥线长度 Stripping Length	[mm]	9~10		
工作温度 Operating temperature	[°C]	-40~105		
符合RoHS环保要求				

6	Screw	Steel	M2 /Zn Plated
5	Button	PA66+GF	UL94V-0
4	Clamp	Copper Alloy	Sn Plated
3	Spring	Stainless steel	
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

YaoFei	DATE	24.09.27	UNITS	mm	THIRD ANGLE PROJECTION	
YangHJ	DATE	24.09.27	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
JASON	DATE	24.09.27	SCALE	1:1	DRAWING TYPE: SP-03	REV 0

	慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	PART NO.: WJ2EDGKNHM-5.08-2*XXP-13-00A
---	--	---