


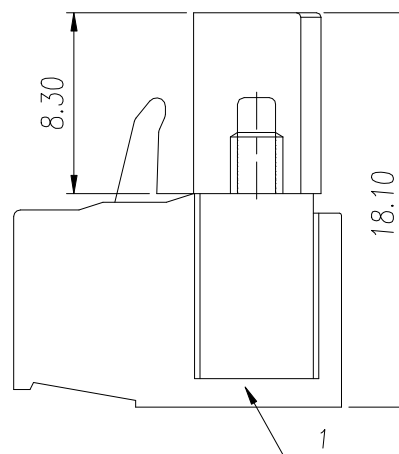

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		YaoFei	23.12.21

UL/CUL 技术参数		UL/CUL Technical Data				
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	15	-	10	
接线范围	Wire Range		28-12			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	400	630	1000	
额定电流	Rated Current	[A]	15	15	15	
额定冲击电压	Impulse withstand voltage	[KV]	6.0	6.0	6.0	
导线截面积	Conductor cross section		0.2-2.5			
硬质/柔性导线	Solid/ flexible	[mm²]				
一般参数 Other Data						
间距	Pitch / 极数	Poles [mm] / [P]	7.5 / 02~24			
剥线长度	Stripping Length	[mm]	7~8			
螺丝	Screw/ 扭矩	Torque(Max) [N.m]	M3/0.5			
工作温度	Operating temperature	[°C]	-40~105			
符合RoHS环保要求						

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

6	Screw 2	Steel	M2.5/Zn Plated
5	Clamp	Copper Alloy	Sn Plated
4	Screw 1	Steel	M3/Zn Plated
3	Cage	Copper Alloy	M3/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YaoFei	DATE	23.12.21	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	YangHJ	DATE	23.12.21	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	JASON	DATE	23.12.21	SCALE	3:1	DRAWING TYPE: SP-03	REV	0

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	PART NO.: WJ2EDGKM-7.5-XXP-1Y-00A
--	--------------------------------------