
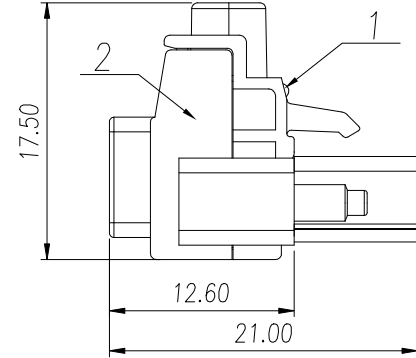
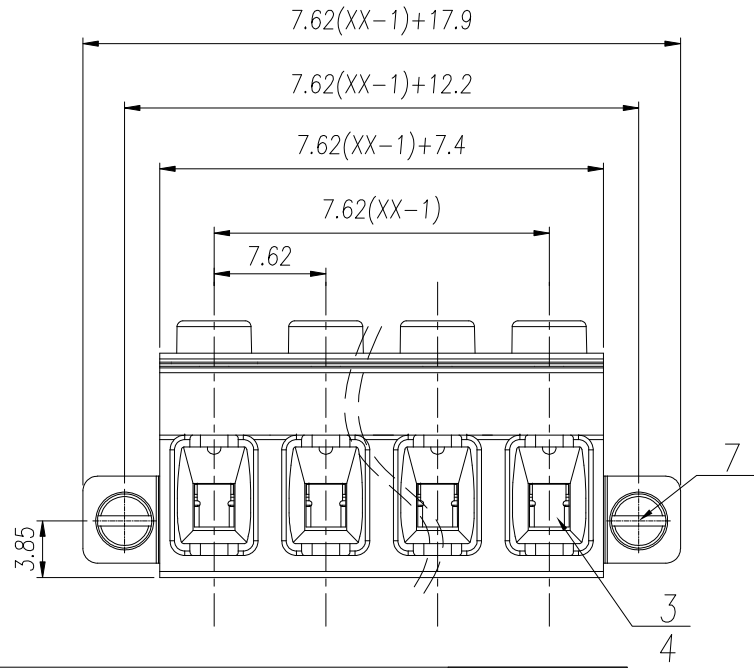


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除单独给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

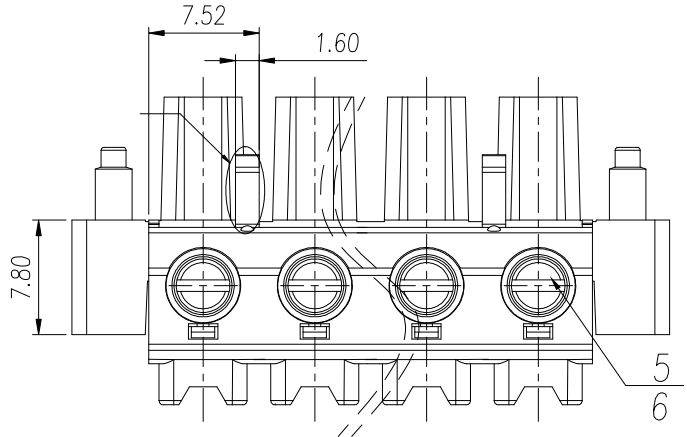

General Tolerances

										— □ ⊥		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to		
	6	10	30	60	100	160						
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		YuCZ	25.05.16

UL/CUL 技术参数
UL/CUL Technical Data

UL1059				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	/
额定电流	Rated Current [A]	20	20	/
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]	30-12		
耐压	Withstanding Voltage	2200V/1Min		

IEC 技术参数
IEC Technical Data

IEC61984				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	16	16	16
额定冲击电压	Impulse withstand voltage [KV]	8.0	8.0	6.0
导线截面积	Conductor cross section			
硬质/柔性导线	Solid/flexible [mm²]	0.2-2.5		

一般参数 Other Data

间距	Pitch / 极数 Poles	[mm] / [P]	7.62 / 02~12
剥线长度	Stripping Length	[mm]	8
螺丝	Screw/ 扭矩 Torque(Max)	[N.m]	M3/0.5
工作温度	Operating temperature	[°C]	-40~105

符合RoHS环保要求

7	Screw 2	Steel	M2.5/Zn Plated
6	Screw 1	Steel	M3/Zn Plated
5	Cage	Copper Alloy	M3/Ni Plated
4	Spring	stainless steel	
3	Clamp	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

DES.	YuCZ	DATE	25.05.16	UNITS	mm	THIRD ANGLE PROJECTION	⊕
CHK.	YangHJ	DATE	25.05.16	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	JASON	DATE	25.05.16	SCALE	2:1	DRAWING TYPE: SP-03	REV V0

慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD		PART NO.: WJ2KHVM-7.62-XXP-1Y-00A
--	--	--------------------------------------