
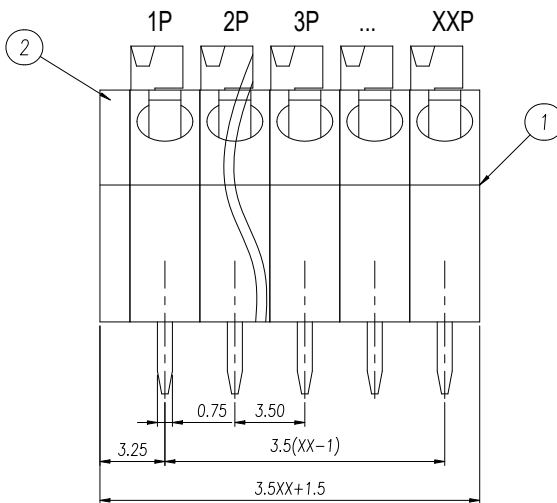
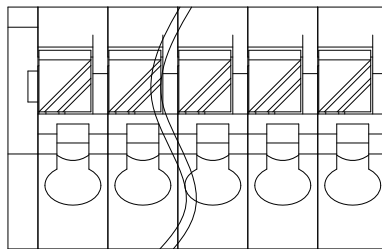
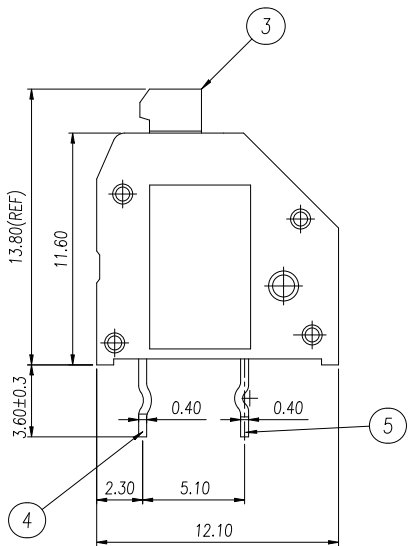


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交还本文档的内容。 未经授权擅自使用, 侵权者将承担法律责任。 美国新嘉坡万捷电子有限公司所有权利。

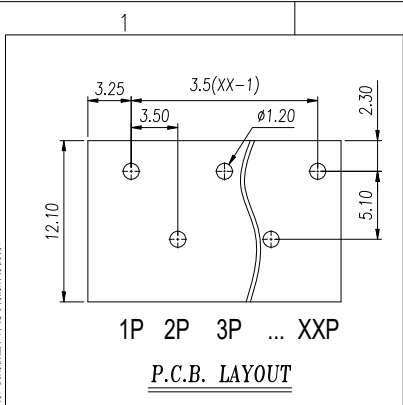

General Tolerances								—	∠	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Pin header 2	Copper Alloy	Sn Plated
4	Pin header 1	Copper Alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	WuBW	DATE	24.09.23	UNITS	mm	THIRD ANGLE PROJECTION	⊕
CHK.	HuHT	DATE	24.09.23	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.09.23	SCALE	3:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO: WJ250-3.5-XXP-1Y-00A	

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		WuBW	24.09.23
UL/CUL 技术参数 UL/CUL Technical Data				
等级 Use Group				
额定电压 Rated Voltage [V]				
额定电流 Rated Current [A]				
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]				
耐电压 Withstanding Voltage				
IEC 技术参数 IEC Technical Data				
过电压类别 Overvoltage Category				
污染等级 Contamination Class				
额定电压 Rated Voltage [V]				
额定电流 Rated Current [A]				
额定冲击电压 Impulse withstand voltage [KV]				
导线截面积 Wire cross section				
硬质/柔性导线 Solid/ flexible [mm²]				
材料 Material				
绝缘材料 Insulation Material				
阻燃等级 Flammability				
导体材料 Conductor Material				
导体表面镀层 Conductor Plating				
一般参数 Other Data				
间距 Pitch /极数 Poles [mm] / [P]				
剥线长度 Stripping Length [mm]				
工作温度 Operating temperature [°C]				
焊锡温度 Soldering temperature [°C]				
引针尺寸 Pin Dimensions [mm]				
PCB板孔径 PCB Hole Diameter [mm]				