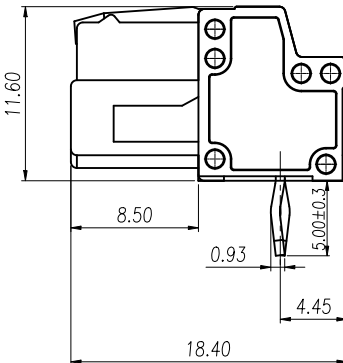
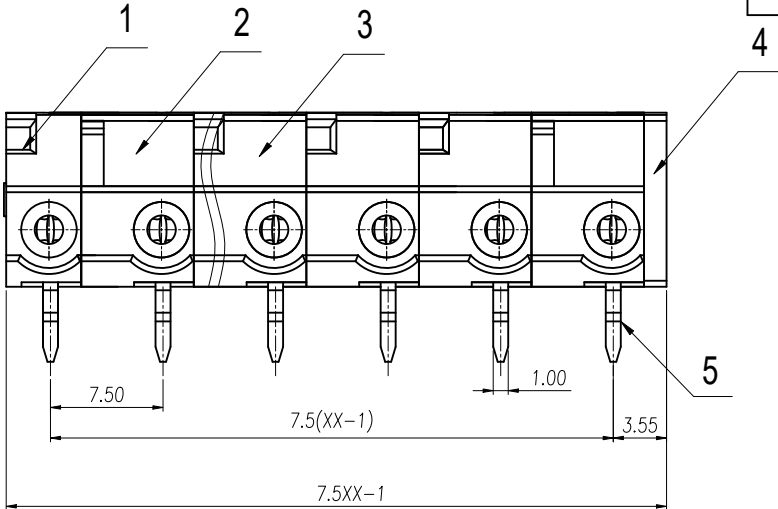
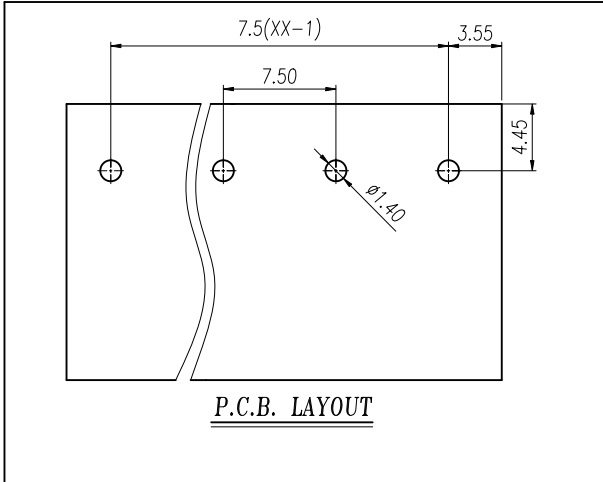
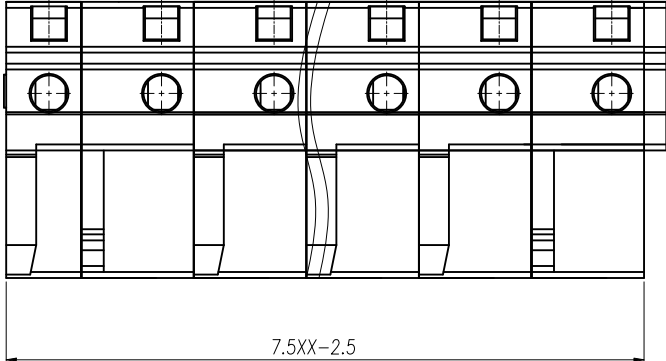


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担赔偿责任。 侵权者将承担赔偿责任。

1		2		3		4		5		6									
								REVISION RECORD											
REV.		ESCRPTION				ECN No.		APPROVED		DATE									
V0		新发行						ZhaoXY		24.01.23									
								UL/CUL 技术参数											
								UL/CUL Technical Data											
								等级		Use Group		B		C		D			
								额定电压		Rated Voltage		[V]		300		-		300	
								额定电流		Rated Current		[A]		15		-		10	
								接线范围		Wire Range		/							
								单/多芯线		Solid/Stranded									
								耐电压		Withstanding Voltage		1600V/1Min							
								IEC 技术参数								IEC61984			
								IEC Technical Data											
过电压类别		Overvoltage Category		III		III		II											
污染等级		Contamination Class		3		2		2											
额定电压		Rated Voltage		[V]		320		320		630									
额定电流		Rated Current		[A]		12		12		10									
额定冲击电压		Impulse withstand voltagea		[KV]		4.0		4.0		4.0									
导线截面积		Conductor cross section		/															
硬质/柔性导线		Solid/ flexible										[mm²]							
材料 Material																			
绝缘材料		Insulation Material		PA66															
阻燃等级		Imflammability		UL94V-0															
导体材料		Contactor Material		铜合金 Copper alloy															
导体表面镀层		Contactive Coating		镀锡 Sn Plated															
一般参数 Other Data																			
间距		Pitch / 极数		Poles		[mm] / [P]		7.5 / 02~12											
工作温度		Operating temperatur		[°C]		-40~105													
焊锡温度		Soldering temperature		260°/5S															
引针尺寸		Pin Dimensions		[mm]		0.6*1.0													
PCB板孔径		PCB Hole Diameter		[mm]		Ø1.4													

General Tolerances										— ▯ ⊥	
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to	
		to 6	to 30	to 60	to 100	to 160	to 100		to 100		
tolerance		±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Pin Header	Copper Alloy	Sn Plated	DES.	ZhaoXY	DATE	24.01.23	UNITS	mm	THIRD ANGLE PROJECTION			
4	Cover	PA66	UL94V-0	CHK.	HuHT	DATE	24.01.23	SIZE	A4	TYPE: CUSTOMER DRAWING		SHEET 1 of 1	
3	Housing3	PA66	UL94V-0	APP.	Jason	DATE	24.01.23	SCALE	2:1	DRAWING TYPE: SP-03		REV	V0
2	Housing2	PA66	UL94V-0	 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD									
1	Housing1	PA66	UL94V-0										
ITEM	NAME OF PART	MATERIAL	NOTES	PART NO.: WJ0605-04XX-1Y-00A									

1		2		3		4		5		FOR-0371 Rev.1.0	
---	--	---	--	---	--	---	--	---	--	------------------	--