
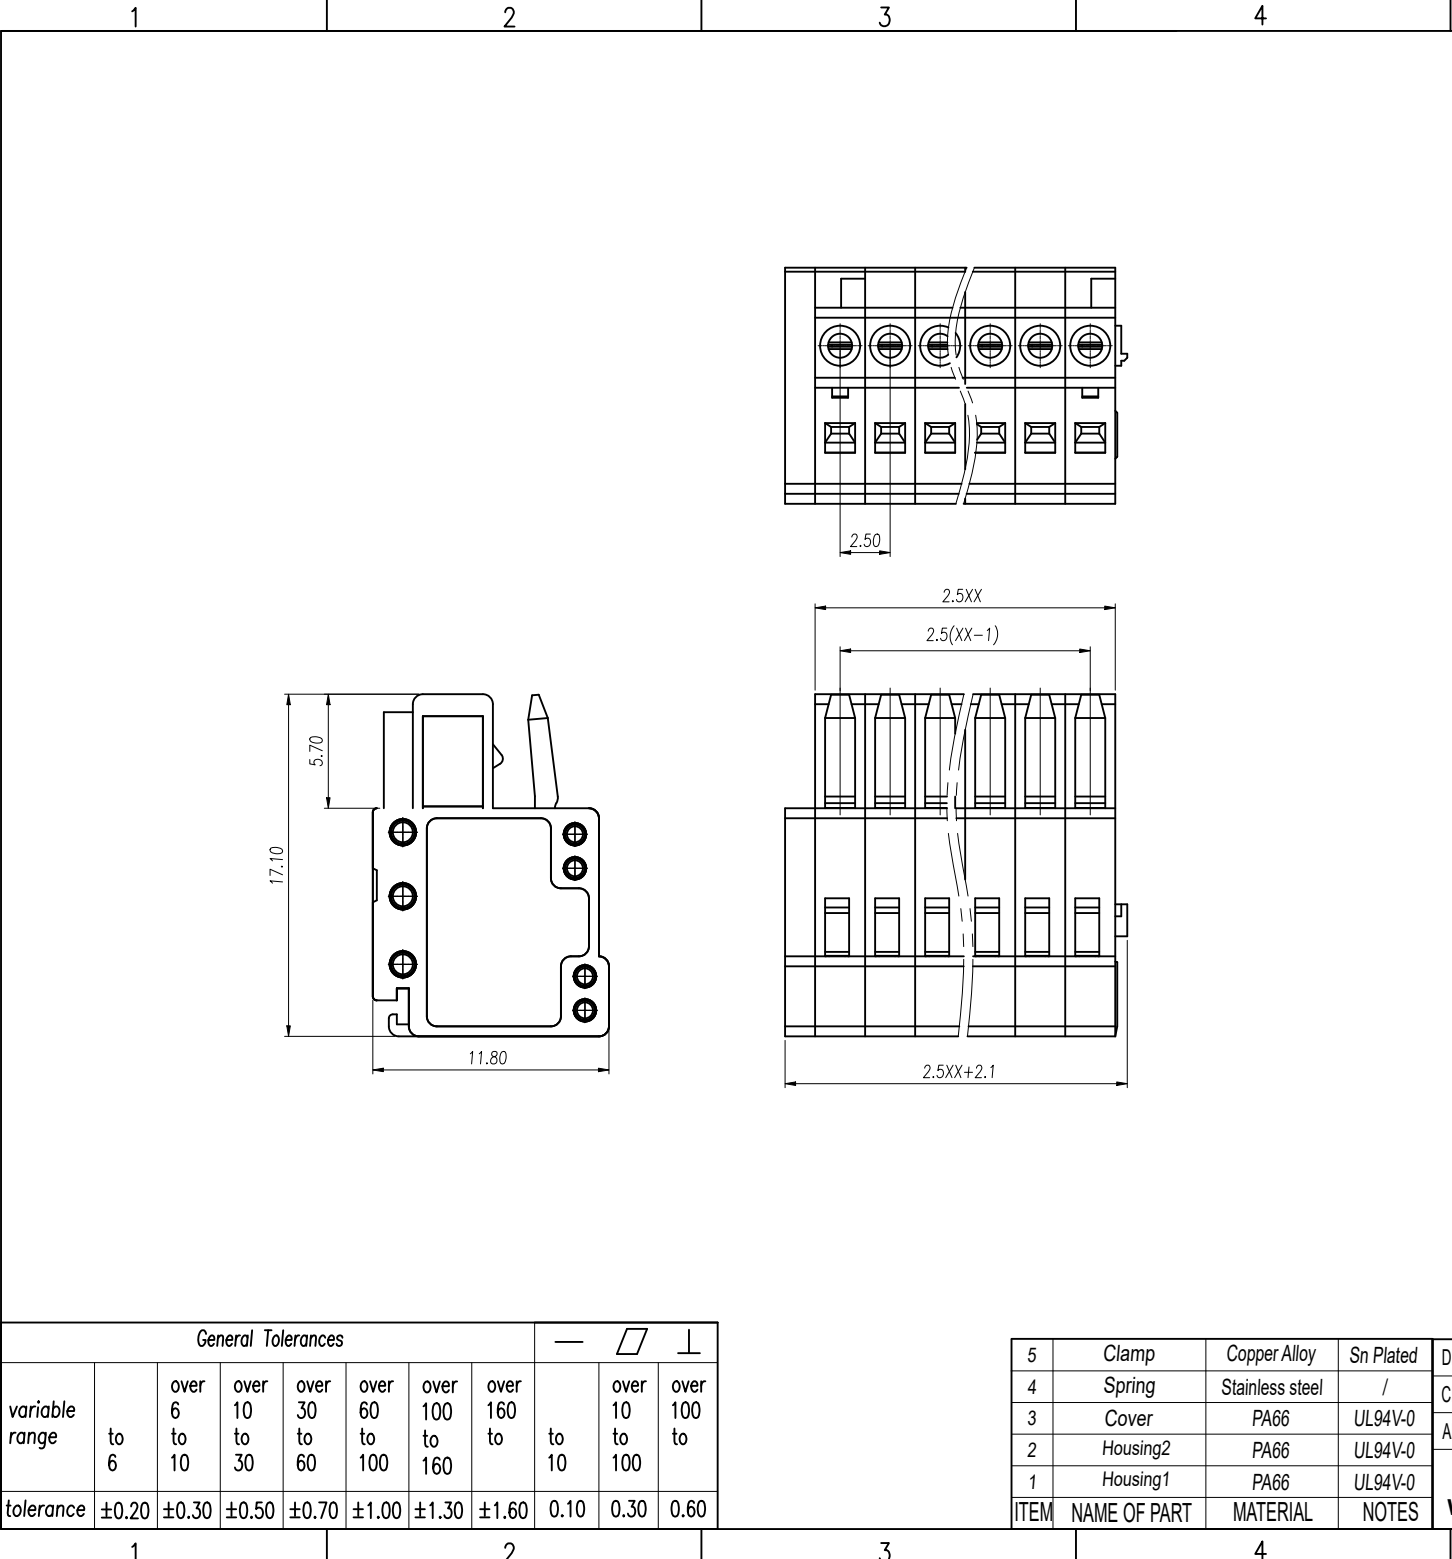


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权,否则禁止转让、复制、利用、交流本文档的内容。侵犯者将承担赔偿责任。本公司保留对专利及发明、实用新型和外观设计的所有权利。



5		6			
REVISION RECORD					
REV.	ESCRPTION		ECN No.	APPROVED	DATE
V0	新发行			WangZF	24.12.05
		UL/CUL 技术参数			
		UL/CUL Technical Data			
等 级		Use Group	B	C	D
额定电压		Rated Voltage [V]	150	-	-
额定电流		Rated Current [A]	4	-	-
接线范围		Wire Range	28-20		
单/多芯线		Solid/Stranded [AWG]			
耐电压		Withstanding Voltage	1300V/1Min		
		IEC 技术参数			
		IEC Technical Data			
过电压类别		Overvoltage Category	III	III	II
污染等级		Contamination Class	3	2	2
额定电压		Rated Voltage [V]	100	160	320
额定电流		Rated Current [A]	6	6	6
额定冲击电压		Impulse withstand voltagea [KV]	2.5	2.5	2.5
导线截面积		Conductor cross section	0.25-0.5		
硬质/柔性导线		Solid/ flexible [mm²]			
材 料		Material			
绝缘材料		Insulation Material	PA66		
阻燃等级		Imflammability	UL94V-0		
导体材料		Contactior Material	铜合金 Copper alloy		
导体表面镀层		Contactive Coating	镀锡 Sn Plated		
一般参数		Other Data			
间距		Pitch / 极数 Poles [mm] / [P]	2.5 / 02~12		
工作温度		Operating temperatur [°C]	-40~105		
剥线长度		Stripping Length [mm]	5-6		

ES.	WangZF	DATE	24.12.05	UNITS	mm	THIRD ANGLE PROJECTION	
HK.	HuHT	DATE	24.12.05	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
PP.	Jason	DATE	24.12.05	SCALE	2:1	DRAWING TYPE: SP-03	REV V0
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO.,LTD						PART NO.: WJ0101-01XX-1Y-00A	

5

FOR-0371 Rev.1.0

General Tolerances								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60